



6.

Mobile Handling

Diverse, practical, mobile solutions that are indispensable. From universally applicable shelf and serving trolleys for safe transport to special trolley variants for the thermoport® or the storage and transport of food through to well-thought-out waste carts – every product efficiently supports work processes. The range is rounded off by an extensive range of practical stackers for plates and tableware. With our mobile helpers, every kitchen is perfectly organized - mobile, flexible and functional.

Dispenser

Program Overview



Stainless steel tube dispenser unheated - for round dishes

Unheated roundware stacker, with 1 or 2 tubes Ø 397mm (max. load 75 kg), flexibly adjustable by 3 adjustment rods for roundware Ø 190-320mm, stacking height approx. 600mm. Dispensing height adjustable via springs. With platform, safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).



Stainless steel tube dispenser heated - for round/square dishes

Statically heated stacker for dishes: round/square, +30°C to +110°C. With polycarbonate lid, double-walled insulated, with 1 / 2 tubes Ø 397mm (round dishes max. Ø 190-320 mm), flexibly adjustable by 3 adjustment rods, max. stacking height approx. 600mm. With platform, safety push handle, 4 bumper corners, stainless castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



Stainless steel tube dispenser convection heated - for round dishes

Circulating air heated roundware stacker, +30°C to +110°C. With polycarbonate lid, double-walled insulation, with 1 / 2 tubes Ø 397mm, flexibly adjustable by 3 adjustment rods. For round dishes Ø 190-320mm, max. stacking height approx. 600mm. With platform, safety push handle, 4 bumper corners, stainless castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



Stainless steel tube dispenser unheated for installation - for square dishes

Statically heated tube ø 397mm (max. load 75 kg), flexibly adjustable by 3 adjustment rods for round dishes ø 190-320mm, stacking height approx. 600mm. Dispensing height adjustable via springs.

Digital HACCP documentation - safe & time-saving

Digital HACCP documentation with our CHECK HACCP system. Hygiene, cleaning & maintenance checklists via app, can be used anywhere. Paper & complete HACCP, can be viewed centrally in your dashboard in real time from anywhere.

Checklists QR code - can be retrofitted at any time - Order No. 94 01 01 14



Stainless steel tube dispenser heated for installation - for round dishes

Statically heated round utensil installation tube, tubes Ø 397mm, flexibly adjustable by 3 adjustment rods for round utensils Ø 190-320mm (max. load 75 kg). Dispensing height adjustable via springs. With polycarbonate lid, anti-tilt & anti-tilt platform, for an installation depth of 685mm. Rated voltage 1N AC 230 V 50 Hz.



Stainless steel exchange dispenser unheated - for universal dishes

Unheated universal harness stacker (max. load 150 or 200 kg) with grid platform (36 holes), tilt- and tilt-proof. Spring force adjustable according to harness weight, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).



Stainless steel interchangeable dispenser heated - for universal dishes

Statically heated universal dish stacker +30°C to +110°C (max. load 150 or 200 kg). With polycarbonate lid, double-walled insulation, with grid platform (36 holes). Spring force adjustable according to harness weight, 6 interchangeable bars, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



Stainless steel interchangeable dispenser convection heated - for universal dishes

Circulating air heated universal dish stacker +30°C to +110°C (max. load 150 or 200 kg). Double-walled insulated, adjustable spring force, safety push handle, stainless steel castors (2 swivel & 2 swivel stop castors). Also available in shortened length for flush fitting in niches. Rated voltage 1N AC 230 V 50 Hz.

Dispenser

Program Overview



Platform dispenser open stainless steel unheated - for GNauto Container

Suitable for GNauto containers (conical), platform size 600x355 mm, stacking height approx. 575 mm. Platform guided to prevent tilting and jamming. Spring force adjustable via heat-resistant tension springs. Safety push handle & 2 push bars Ø 25 mm.



Platform dispenser open stainless steel unheated - for GNauto press-in-lids

Suitable for GNauto press-in-lids, platform size 600x355 mm. Platform guided to prevent tilting and jamming. Spring force adjustable via heat-resistant tension springs. Safety push handle & 2 push bars Ø 25 mm.



GN stacking trolley stainless steel unheated

The optimal solution for tidy and space-saving storage of containers and lids in all common sizes, thanks to flexibly adjustable center walls for insertion.



Platform dispenser open stainless steel unheated - for GN & EN trays & baskets

Suitable for baskets and trays (GN & EN, with dimensions 530x400 or 800mm), stacking height approx. 575mm. Platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).

Digital HACCP documentation - safe & time-saving

Digital HACCP documentation with our CHECK HACCP system. Hygiene, cleaning & maintenance checklists via app, can be used anywhere. Paper & complete HACCP, can be viewed centrally in your dashboard in real time from anywhere.

Checklists QR code - can be retrofitted at any time - Order No. 94 01 01 14



Platform dispenser open stainless steel unheated - for baskets



Suitable for baskets (with dimension 500x500mm), stacking height approx. 575mm. Platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).

Platform dispenser open stainless steel heated - for installation - for baskets



Suitable for baskets, platform guided against tipping & tilting, spring force flexibly adjustable, with rectangular support frame, for an installation depth of 580 or 740mm.

Platform dispenser open stainless steel unheated - for installation for baskets & trays



Suitable for baskets and GN trays Platform guided tilt- & tilt-proof, spring force flexibly adjustable, with rectangular egg-bearing frame, for an installation depth of 580 or 740mm.

Platform dispenser closed unheated - for baskets & JVA menu trays



Suitable for baskets, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).

Dispenser

Program Overview



Platform dispenser closed unheated - for plastic parts

Suitable for plastic parts, with slotted hole insert, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).



Platform dispenser closed convection-cooled - for baskets

For baskets (with max. dimension 500x500mm) +5°C to +8°C, with attached stainless steel lid 68mm, stacking height approx. 600mm. Double-walled insulated. With support frame, platform tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Refrigerant R134a, nominal voltage 1N AC 230 V 50 Hz.



Platform dispenser closed convection heated - for GN trays & JVA menu trays

Only for stainless steel GN baskets (with dimension max. 530x650mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



Platform dispenser closed convection heated - for GN- & EN trays

Only for stainless steel baskets GN & EN (with dimension max. 530x800mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.

Digital HACCP documentation - safe & time-saving

Digital HACCP documentation with our CHECK HACCP system. Hygiene, cleaning & maintenance checklists via app, can be used anywhere. Paper & complete HACCP, can be viewed centrally in your dashboard in real time from anywhere.


Checklists QR code - can be retrofitted at any time - Order No. 94 01 01 14



Platform dispenser closed convection heated - for baskets



Only for stainless steel baskets (with dimension max. 500x500mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.

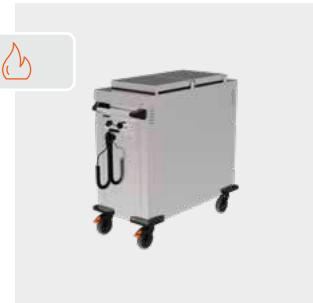

Ultra dispenser made of stainless steel convection heated - for heat & ultrasonic bowls

2 tubes for 92 ultrasonic bowls (Ø255), stacking height 610mm, shaft dia. 260x260mm per tube. Max. load 75kg, anti-tilt platform, flexible adjustable springs. Double-walled, reinforced heat insulation, reduced surface temperature. 2 stainless steel hinged lids, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



Stainless steel tube dispenser unheated - for round dishes

Unheated roundware stacker, with 1 or 2 tubes Ø 397mm (max. load 75 kg), flexibly adjustable by 3 adjustment rods for roundware Ø 190-320mm, stacking height approx. 600mm. Dispensing height adjustable via springs. With platform, safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).



[More info](#)



Tubular dispenser 1x - unheated

Number of tubes: 1 | Castor Ø 125 mm | Incl. cover hood: Not included

Dimensions	Weight	Order no.
mm 620 x 480 x 900	kg 21,5	89010468



Tubular dispenser 2x - unheated

Number of tubes: 2 | Castor Ø 125 mm | Incl. cover hood: Not included

Dimensions	Weight	Order no.
mm 955 x 480 x 900	kg 32,5	89010469



Tubular dispenser 2x - with slits

Number of tubes: 2 | Castor Ø 125 mm | Incl. cover hood: Not included

Dimensions	Weight	Order no.
mm 955 x 480 x 900	kg 31,0	89010369



Built-in disp. ERRV-190-320-750 - 2010

Stacking height: 600 mm | {number of tubes: 1 | Incl. lid cover: Not included}

Dimensions	Weight	Order no.
mm 750	kg 6,0	89050350



Built-in disp. ERRV-190-320-640 - 2010

Stacking height: 495 mm | {number of tubes: 1 | Incl. lid cover: Not included}

Dimensions	Weight	Order no.
mm 640	kg 5,7	89050351

Stainless steel tube dispenser heated - for round/square dishes

Statically heated stacker for dishes: round/square, +30°C to +110°C. With polycarbonate lid, double-walled insulated, with 1 / 2 tubes Ø 397mm (round dishes max. Ø 190-320 mm), flexibly adjustable by 3 adjustment rods, max. stacking height approx. 600mm. With platform, safety push handle, 4 bumper corners, stainless castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



[More info](#)

Tubular dispenser RRV-H1 190-320 - 2010

Number of tubes: 1 | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (1x in plastic)


Dimensions	Weight	Connected load	Order no.
mm 618 x 480 x 1030	kg 32,5	kW 0,866	89010268



Tubular dispenser RRV-H2 190-320 - 2010

Number of tubes: 2 | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (2x in plastic)

Dimensions	Weight	Connected load	Order no.
mm 955 x 480 x 1030	kg 47,0	kW 1,400	89010269

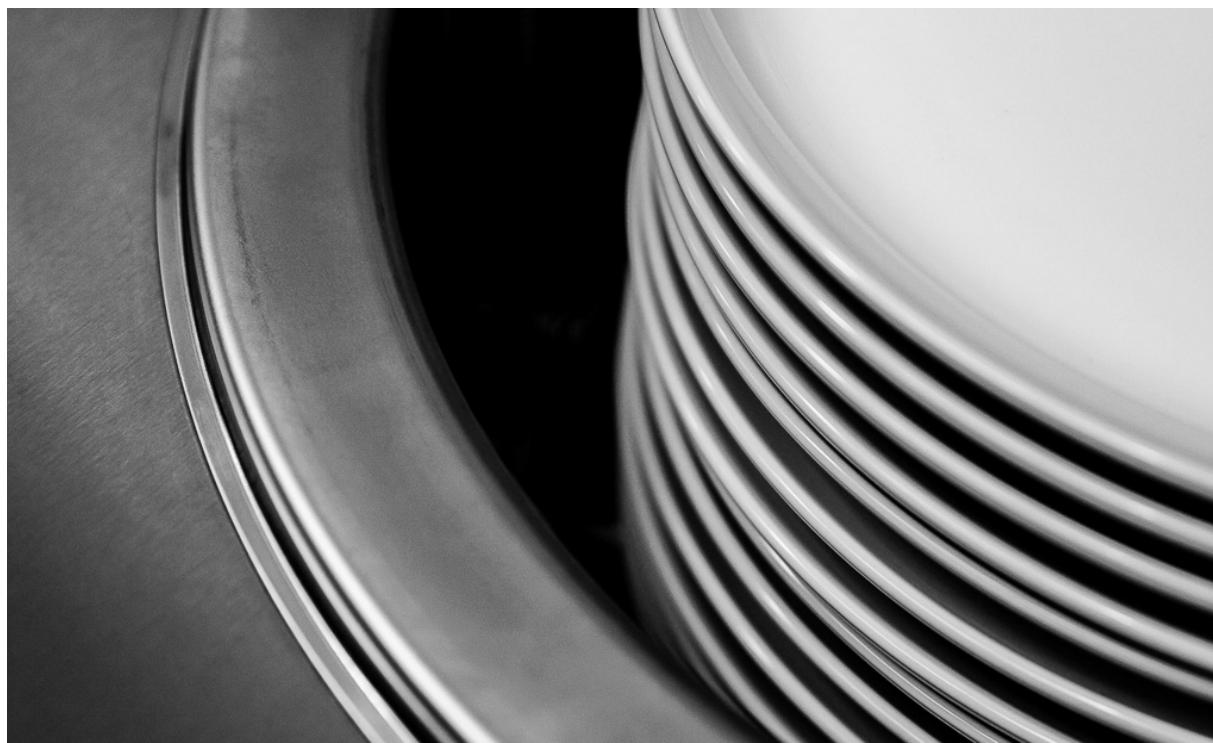

Stainless steel tube dispenser convection heated - for round dishes

Circulating air heated roundware stacker, +30°C to +110°C. With polycarbonate lid, double-walled insulation, with 1 / 2 tubes Ø 397mm, flexibly adjustable by 3 adjustment rods. For round dishes Ø 190-320mm, max. stacking height approx. 600mm. With platform, safety push handle, 4 bumper corners, stainless castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



More info



Tubular dispenser RRV-U1 190-320

Number of tubes: 1 | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (1x in plastic)

Dimensions	Weight	Connected load	Order no.
mm 620 x 480 x 1030	kg 33,8	kW 0,900	89010168



Tubular dispenser RRV-U2 190-320

Number of tubes: 2 | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (2x in plastic)

Dimensions	Weight	Connected load	Order no.
mm 986 x 480 x 1030	kg 49,0	kW 1,460	89010169



Made in Germany

Stainless steel tube dispenser unheated for installation - for square dishes

Statically heated tube ø 397mm (max. load 75 kg), flexibly adjustable by 3 adjustment rods for round dishes ø 190-320mm, stacking height approx. 600mm. Dispensing height adjustable via springs.



More info

Multipurpose pipe EWE 590x290-750 ,2005

Stack height: 540 mm | Shaft dimensions i. L.: 590 x 290 mm



Dimensions	Weight	Order no.
mm 674 x 334 x 745,8	kg 11,0	59034903



Stainless steel tube dispenser heated for installation - for round dishes

Statically heated round utensil installation tube, tubes Ø 397mm, flexibly adjustable by 3 adjustment rods for round utensils Ø 190-320mm (max. load 75 kg). Dispensing height adjustable via springs. With polycarbonate lid, anti-tilt & anti-tilt platform, for an installation depth of 685mm. Rated voltage 1N AC 230 V 50 Hz.



[More info](#)



Built-in disp. ERRV-H-190-320-685 - 2010

Stacking height: 495 mm | {number of tubes: 1 | Protection class: IPX4 | Incl. cover hood: Included (1x in plastic) | Cover cutout: 380 mm | Cutout for switch cover: 152 x 85 mm

Tube diameter mm	Weight kg	Connected load kW	Order no.
397	14,0	0,550	89050425



Built-in disp. ERRV-H-190-320-785 - 2010

Stacking height: 600 mm | {number of tubes: 1 | Protection class: IPX4 | Incl. cover hood: Included (1x in plastic) | Cover cutout: 380 mm | Cutout for switch cover: 152 x 85 mm

Tube diameter mm	Weight kg	Connected load kW	Order no.
397	14,5	0,550	89050426

Built-in disp. ERRV-H-190-280-685 - 2005

Stacking height: 595 mm | {number of tubes: 1 | Protection class: IPX4 | Incl. cover hood: Included (1x in plastic) | Cover cutout: 380 mm | Cutout for switch cover: 152 x 85 mm

Tube diameter mm	Weight kg	Connected load kW	Order no.
372	14,3	0,550	89050423

Built-in disp. ERRV-H-190-280-785 - 2005

Stacking height: 700 mm | {number of tubes: 1 | Protection class: IPX4 | Incl. cover hood: Included (1x in plastic) | Cover cutout: 380 mm | Cutout for switch cover: 152 x 85 mm

Tube diameter mm	Weight kg	Connected load kW	Order no.
372	15,0	0,550	89050424

Tube dispenser accessories

Matching accessories for the tube dispenser - such as matching stainless steel lid for optimal insulation or a poly lid cover, as well as bracket.



More info

Lid s/s - ERR-325/RR/RRH/RRU

Matching flat, double-walled, insulated stainless steel lid, lockable, for all round tubular dispenser models, as an alternative to the standard plastic lid.



Weight

kg

1,3

Order no.

[89060102](#)

Hood poly - RRV/ERRV 190-320

Matching plastic lid hood, 130 mm high, for round tubular dispensers.

Weight

kg

0,9

Order no.

[89060115](#)

Hood poly - for RRV/ERRV 190-280

Weight

kg

0,7

Order no.

[89060109](#)

Lid holder - for tubular dispenser

Lid holder for a 130 mm polycarbonate lid for tubular dispensers.

Weight

kg

-

Order no.

[89061001](#)

Stainless steel exchange dispenser unheated - for universal dishes

Unheated universal harness stacker (max. load 150 or 200 kg) with grid platform (36 holes), tilt- and tilt-proof. Spring force adjustable according to harness weight, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).



[More info](#)



Exchange dispenser - unheated

Shaft dimensions i. L.: 590 x 290 mm | Stacking height without/with cover: 560 mm / 645 mm
| Castor Ø 125 mm | Incl. lid hood: Not included | Platform type: Grid platform with 6 guide bars

Dimensions mm	Weight kg	Order no.
955 x 480 x 900	37,5	89010459



Exchange dispenser - unheated Q 1/1

Shaft dimensions i. L.: 525 x 590 mm | Stacking height without/with cover: 600 mm | Castor Ø 125 mm | Incl. lid hood: Not included | Platform type: 36-hole platform with 6 guide bars

Dimensions mm	Weight kg	Order no.
750 x 690 x 911	49,5	89020212



Stainless steel interchangeable dispenser heated - for universal dishes

Statically heated universal dish stacker +30°C to +110°C (max. load 150 or 200 kg). With polycarbonate lid, double-walled insulation, with grid platform (36 holes). Spring force adjustable according to harness weight, 6 interchangeable bars, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



[More info](#)

Exchange dispenser - WE-H - 2005

Shaft dimensions i. L.: 590 x 290 mm | Stacking height without/with cover hood: 560 mm / 645 mm | Protection class: IPX5 | Castor Ø 125 mm | Incl. lid hood: Included (1x in plastic) | Platform type: Grid platform

Dimensions	Weight	Connected load	Order no.
mm 955 x 480 x 1030	kg 53,0	kW 1,700	89010259



Exchange dispenser - WE-H - 750 - 2005

Shaft dimensions i. L.: 590 x 290 mm | Stacking height without/with cover hood: 560 mm / 645 mm | Protection class: IPX5 | Castor Ø 125 mm | Incl. lid hood: Included (1x in plastic) | Platform type: Grid platform

Dimensions	Weight	Connected load	Order no.
mm 750 x 420 x 1030	kg 50,5	kW 1,700	89010260



Stainless steel interchangeable dispenser convection heated - for universal dishes

Circulating air heated universal dish stacker +30°C to +110°C (max. load 150 or 200 kg). Double-walled insulated, adjustable spring force, safety push handle, stainless steel castors (2 swivel & 2 swivel stop castors). Also available in shortened length for flush fitting in niches. Rated voltage 1N AC 230 V 50 Hz.



[More info](#)



Exchange dispenser - WE-U

Shaft dimensions i. L.: 590 x 290 mm | Stacking height without/with cover hood: 545 mm / 645 mm | Protection class: IPX5 | Castor Ø 125 mm | Incl. lid hood: Included (1x in plastic) | Platform type: Grid platform with 6 guide bars

Dimensions	Weight	Connected load	Order no.
mm 955 x 480 x 1030	kg 55,2	kW 1,800	89010159



Exchange dispenser - WE-QU1/1

Shaft dimensions i. L.: 525 x 590 mm | Stacking height without/with cover hood: 600 mm | Protection class: IPX5 | Castor Ø 125 mm | Incl. lid hood: Included (1 x in stainless steel) | Platform type: 36-hole platform with 6 guide bars

Dimensions	Weight	Connected load	Order no.
mm 860 x 690 x 911	kg 67,0	kW 2,250	89020108



Exchange dispenser accessories

Matching accessories for the exchange dispenser - such as corresponding matching stainless steel cover hood for optimal insulation.



More info

Hood s/s - WE-H,WE-U,WE-L,WE

Matching stainless steel lid hood, 70 mm high, for all exchange dispenser models (except Q models).

Weight

kg

2,6

Order no.

[89060110](#)

Hood s/s 1/1 - 30mm - PG/WE-Q1/1

Stainless steel lid hood 1/1, low, 30 mm high, suitable for Q 1/1 platform and exchange dispenser baskets.

Weight

kg

4,0

Order no.

[89070101](#)

Hood poly - WE-H,WE-U,WE-L,WE

Matching plastic lid hood, 130 mm high, for unheated exchange dispensers.

Weight

kg

1,1

Order no.

[89060112](#)

Platform dispenser open stainless steel unheated - for GNauto Container

Suitable for GNauto containers (conical), platform size 600x355 mm, stacking height approx. 575 mm. Platform guided to prevent tilting and jamming. Spring force adjustable via heat-resistant tension springs. Safety push handle & 2 push bars Ø 25 mm.



[More info](#)



GNauto dispenser 1x1/1 container

Platform dimensions: 600 x 355 mm | Stack height: 575 mm | Configuration: 1 x 100 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020317



GNauto dispenser 2x1/2 container

Platform dimensions: 600 x 355 mm | Stack height: 575 mm | Configuration: 2 x 100 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020315



GNauto dispenser 3x1/3 container

Platform dimensions: 600 x 355 mm | Stack height: 575 mm | Configuration: 3 x 100 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020313



Platform dispenser open stainless steel unheated - for GNauto press-in-lids

Suitable for GNauto press-in-lids, platform size 600x355 mm. Platform guided to prevent tilting and jamming. Spring force adjustable via heat-resistant tension springs. Safety push handle & 2 push bars Ø 25 mm.



[More info](#)



GNauto dispenser 1x1/1 press-in lid

Platform dimensions: 600 x 355 mm | Stack height: 400 mm | Configuration: 1 x 120 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020318



GNauto dispenser 2x1/2 press-in lid

Platform dimensions: 600 x 355 mm | Stack height: 400 mm | Configuration: 2 x 160 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020316



GNauto dispenser 3x1/3 press-in lid

Platform dimensions: 600 x 355 mm | Stack height: 375 mm | Configuration: 3 x 150 Stück | 2 swivel-; 2 swivel castors with brakes Rustproof | Castor Ø 125 mm | 4 corner bumpers | Max. load capacity: 200 kg

Dimensions	Weight	Order no.
mm 836 x 500 x 1091	kg 35,0	89020314



GN stacking trolley stainless steel unheated

The optimal solution for tidy and space-saving storage of containers and lids in all common sizes, thanks to flexibly adjustable center walls for insertion.



More info



Universal stacking trolley 1-sided

2 swivel; 2 swivel castors with brakes | Castor Ø 125 mm | 4 deflector castors | Max. load capacity: 150 kg

Dimensions	Weight	Order no.
mm 1200 x 500 x 970	kg 30,0	88025077



Universal stacking trolley 2-sided

2 swivel; 2 swivel castors with brakes | Castor Ø 125 mm | 4 deflector castors | Max. load capacity: 140 kg

Dimensions	Weight	Order no.
mm 1200 x 800 x 970	kg 60,0	88025099

Platform dispenser open stainless steel unheated - for GN & EN trays & baskets

Suitable for baskets and trays (GN & EN, with dimensions 530x400 or 800mm), stacking height approx. 575mm. Platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).



[More info](#)

Platform dispenser open - SV 1/1

Platform dimensions: 412 x 545 mm | Basket/Tray Dimensions: max. 530 x 400 mm | stacking height: 575 mm | castor Ø 125 mm | Basket capacity: 6 x (530 x 400 x 85 mm) oder 4 x (530 x 400 x 120 mm)

Dimensions	Weight	Order no.
mm 690 x 690 x 911	kg 35,0	89020301



Platform dispenser open - SV 2/1

Platform dimensions: 812 x 545 mm | Basket/Tray Dimensions: max. 530 x 800 mm | stacking height: 575 mm | castor Ø 125 mm | Basket capacity: 12 x (530 x 400 x 85 mm) oder 8 x (530 x 400 x 120 mm) oder 6 x (530 x 800 x 85 mm) oder 4 x (530 x 800 x 120 mm)

Dimensions	Weight	Order no.
mm 1050 x 690 x 911	kg 43,0	89020302



Platform dispenser open - GN 2/1

Platform dimensions: 662 x 545 mm | Basket/Tray Dimensions: max. 530 x 650 mm | stacking height: 575 mm | castor Ø 125 mm | Basket capacity: 7 x (530 x 650 x 75 mm) oder 5 x (530 x 650 x 115 mm) oder 10 x (530 x 325 x 115 mm)

Dimensions	Weight	Order no.
mm 880 x 690 x 911	kg 39,0	89020303



Platform dispenser open - trays 1/1

Platform dimensions: 535 x 412 mm | Basket/Tray Dimensions: max. 530 x 400 mm | stacking height: 575 mm | castor Ø 125 mm | Basket capacity: 6 x (530 x 400 x 85 mm) oder 4 x (530 x 400 x 120 mm)

Dimensions	Weight	Order no.
mm 680 x 500 x 911	kg 28,5	89020306



Platform dispenser open stainless steel unheated - for baskets

Suitable for baskets (with dimension 500x500mm), stacking height approx. 575mm. Platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors).



[More info](#)



Platform dispenser open - Q 1/1

Platform dimensions: 537 x 555 mm | Basket/Tray Dimensions: max. 500 x 500 mm | stacking height: 575 mm | castor Ø 125 mm | Basket capacity: 7 x (500 x 500 x 75 mm) oder 5 x (500 x 500 x 115 mm) oder 8 x (500 x 500 x 70 mm) oder 5 x (500 x 500 x 70 mm mit Geschirrkorb-aufsatzen)

Dimensions	Weight	Order no.
mm 690 x 690 x 911	kg 36,0	89020304



Platform dispenser open stainless steel heated - for installation - for baskets

Suitable for baskets, platform guided against tipping & tilting, spring force flexibly adjustable, with rectangular support frame, for an installation depth of 580 or 740mm.



More info

Built-in platform disp. EPU-Q1/1, H=600

Installation depth: 600 mm or stacking height: 430 mm | Platform dimensions: 535 x 535 mm | Basket/Tray dimensions: max. 530 x 530 mm | Switch panel cutout: 176 x 108 mm | Incl. lid cover: Included (1 x in stainless steel) | Finish: square



Dimensions mm	Weight kg	Connected load kW	Order no.
717 x 736 x 700	51,0	1,560	89030301

Built-in platform disp. EPU-Q1/1, H=760

Installation depth: 760 mm or stacking height: 640 mm | Platform dimensions: 535 x 535 mm | Basket/Tray dimensions: max. 530 x 530 mm | Switch panel cutout: 176 x 108 mm | Incl. lid cover: Included (1 x in stainless steel) | Finish: square



Dimensions mm	Weight kg	Connected load kW	Order no.
705 x 664 x 760	60,0	1,560	89030302

Platform dispenser open stainless steel unheated - for installation for baskets & trays

Suitable for baskets and GN trays Platform guided tilt- & tilt-proof, spring force flexibly adjustable, with rectangular egg-bearing frame, for an installation depth of 580 or 740mm.



More info



Built-in platform disp. EPO-Q1/1 H=580

Platform dimensions: 535 x 535 mm | Basket/Tray Dimensions: max. 530 x 530 mm | stacking height: 430 mm | finish:

Dimensions mm	Weight kg	Order no.
666 x 628 x 580	16,0	89030101



Built-in platform disp. EPO-Q1/1, H=750

Platform dimensions: 535 x 535 mm | Basket/Tray Dimensions: max. 530 x 530 mm | stacking height: 590 mm | finish:

Dimensions mm	Weight kg	Order no.
666 x 628 x 740	19,0	89030102



Built-in platform disp. EPO-GN1/1 H=580

Platform dimensions: 535 x 385 mm | Basket/Tray Dimensions: max. 530 x 370 mm | stacking height: 455 mm | finish:

Dimensions mm	Weight kg	Order no.
666 x 478 x 580	13,5	89030103



Built-in platform disp. EPO-GN1/1 H=750

Platform dimensions: 535 x 385 mm | Basket/Tray Dimensions: max. 530 x 370 mm | stacking height: 590 mm | finish:

Dimensions mm	Weight kg	Order no.
666 x 478 x 750	16,0	89030104



Built-in platform disp. EPG-Q1/1, H=580

Platform dimensions: 535 x 535 mm | Basket/Tray Dimensions: max. 530 x 530 mm | stacking height: 430 mm | finish: square

Dimensions mm	Weight kg	Order no.
666 x 628 x 580	21,0	89030201

Built-in platform disp. EPG-Q1/1, H=750

Platform dimensions: 535 x 535 mm | Basket/Tray Dimensions: max. 530 x 530 mm | stacking height: 590 mm | finish: square



Dimensions	Weight	Order no.
mm	kg	
666 x 628 x 750	24,5	89030202



Platform dispenser closed unheated - for baskets & JVA menu trays

Suitable for baskets, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).



[More info](#)



Platform dispenser - unheated 630x425

Platform dimensions: 630 x 425 mm | Basket/Tray Dimensions: | Castor Ø 125 mm | Basket capacity:

Dimensions	Weight	Order no.
mm	kg	
871 x 580 x 911	46,2	89020214



Platform dispenser - PG-GN2/1

Platform dimensions: 535 x 660 mm | Basket/Tray Dimensions: max. 530 x 650 mm | Castor Ø 125 mm | Basket capacity: 8 x (530 x 650 x 75 mm) oder 5 x (530 x 650 x 115 mm)

Dimensions	Weight	Order no.
mm	kg	
880 x 690 x 911	50,0	89020201



Platform dispenser - unheated SV 2/1

Platform dimensions: 535 x 810 mm | Basket/Tray Dimensions: max. 530 x 800 mm | Castor Ø 125 mm | Basket capacity: 14 x (530 x 400 x 85 mm) oder 10 x (530 x 400 x 120 mm) oder 7 x (530 x 800 x 85 mm) oder 5 x (530 x 800 x 120 mm)

Dimensions	Weight	Order no.
mm	kg	
1040 x 690 x 911	54,5	89020206



Platform dispenser - unheated Q 1/1

Platform dimensions: 535 x 505 mm | Basket/Tray Dimensions: max. 500 x 500 mm | Castor Ø 125 mm | Basket capacity: 8 x (500 x 500 x 115 mm) oder 5 x (500 x 500 x 115 mm) oder 8 x (500 x 500 x 70 mm) oder 5 x (500 x 500 x 70 mm mit Geschirrkorbaufsatz)

Dimensions	Weight	Order no.
mm	kg	
690 x 692 x 906	46,2	89020202

Platform disp. PG-GN 2x1/1, cutlery box

Platform dimensions: 535 x 330 mm | Basket/Tray Dimensions: 530 x 325 mm | Castor Ø 125 mm | Basket capacity:

Dimensions	Weight	Order no.
mm	kg	
960 x 690 x 1340	80,0	89020215



Platform dispenser closed unheated - for plastic parts

Suitable for plastic parts, with slotted hole insert, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, rustproof castors (2 swivel & 2 swivel stop castors).



[More info](#)



Platform dispenser - PG-4S

Platform dimensions: | Castor Ø 125 mm

Dimensions	Weight	Order no.
mm 790 x 690 x 911	kg 56,0	89020203



Platform dispenser - PG-6S

Platform dimensions: | Castor Ø 125 mm

Dimensions	Weight	Order no.
mm 1090 x 690 x 911	kg 61,0	89020204



Platform dispenser closed convection-cooled - for baskets

For baskets (with max. dimension 500x500mm) +5°C to +8°C, with attached stainless steel lid 68mm, stacking height approx. 600mm. Double-walled insulated. With support frame, platform tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Refrigerant R134a, nominal voltage 1N AC 230 V 50 Hz.



[More info](#)

platform disp. PK-Q1/1 refrigerated R290

Platform dimensions: 535 x 505 mm | Basket/Tray Dimensions: max. 500 x 500 mm | Castor Ø 125 mm

Dimensions mm	Weight kg	Connected load kW	Order no.
1161 x 812 x 950	140,0	0,410	89020402



Platform dispenser closed convection heated - for GN trays & JVA menu trays

Only for stainless steel GN baskets (with dimension max. 530x650mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



More info



Platform dispenser - PU-630x425 85°

Heating range: +30°C to +85°C | Platform dimensions: | Basket/Tray Dimensions: | Castor Ø 125 mm | finish: square

Dimensions	Weight	Connected load	Order no.
mm 994 x 647 x 960	kg 69,0	kW 2,400	89020125



Platform dispenser - PU-630x425 140°

Heating range: +30°C to +140°C | Platform dimensions: | Basket/Tray Dimensions: | Castor Ø 125 mm | finish: square

Dimensions	Weight	Connected load	Order no.
mm 994 x 647 x 960	kg 69,0	kW 2,400	89020124



Platform dispenser - PU-GN2/1

Heating range: +30°C to +100°C | Platform dimensions: 535 x 660 mm | Basket/Tray Dimensions: max. 530 x 650 mm | Castor Ø 125 mm | finish:

Dimensions	Weight	Connected load	Order no.
mm 990 x 690 x 911	kg 70,2	kW 2,240	89020103



Menu tray dispenser - PU-M2/1

Heating range: +50°C to +185°C | Platform dimensions: 535 x 660 mm | Basket/Tray Dimensions: max. 530 x 650 mm | Castor Ø 125 mm | finish:

Dimensions	Weight	Connected load	Order no.
mm 1148 x 744 x 911	kg 90,0	kW 2,250	89020107

Platform dispenser closed convection heated - for GN- & EN trays

Only for stainless steel baskets GN & EN (with dimension max. 530x800mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



[More info](#)

Platform dispenser - PU-SV2/1

Heating range: +30°C to +100°C | Platform dimensions: 535 x 810 mm | Basket/Tray Dimensions: max. 530 x 800 mm | Castor Ø 125 mm | finish:

Dimensions mm	Weight kg	Connected load kW	Order no.
1142 x 690 x 911	77,2	2,240	89020102



Platform dispenser closed convection heated - for baskets

Only for stainless steel baskets (with dimension max. 500x500mm), with stainless steel lid 35mm can be hooked in at the front, stacking height approx. 600mm. Double-walled insulated. With support frame, platform guided tilt- & tilt-proof, max. load 200 kg. Spring force flexibly adjustable, with safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



More info



Platform dispenser - PU-Q1/1

Heating range: +30°C to +100°C | Platform dimensions: 535 x 510 mm | Basket/Tray Dimensions: max. 500 x 500 mm | Castor Ø 125 mm | finish: square

Dimensions mm	Weight kg	Connected load kW	Order no.
840 x 690 x 911	64,0	2,240	89020104

Platform dispenser Accessories

Matching accessories for the platform dispensers - such as matching stainless steel lid hoods for optimum insulation, perforated insert trays, various stainless steel/plastic baskets or a practical cutlery attachment.



[More info](#)

Hood s/s, tall plastic crockery PG-6S

Stainless steel lid hood, low, 35 mm high, suitable for platform dispensers with large plastic insulated crockery.

Weight

kg

-

Order no.

[89070401](#)

Hood s/s, low, plastic crockery -PG-4S

Stainless steel lid hood, low, 35 mm high, suitable for platform dispensers with small plastic insulated crockery.

Weight

kg

-

Order no.

[89070301](#)

Hood s/s 1/1 - 30mm - PG/WE-Q1/1

Stainless steel lid hood 1/1, low, 30 mm high, suitable for Q 1/1 platform and exchange dispenser baskets.

Weight

kg

4,0

Order no.

[89070101](#)

Hood s/s 2/1 - 30mm - PG-GN2/1

Stainless steel lid hood 2/1, low, 30 mm high, suitable for GN 2/1 platform dispensers.



Weight

kg

3,0

Order no.

[89070201](#)

Basket rilsan coat.SV 2/1-530x800x120mm

Basket made of rilsan-coated steel wire, grey heat-resistant plastic coating, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter)
- suitable for EN and GN 2/1 platform dispensers.

Weight

kg

3,4

Order no.

[89060204](#)

Basket rilsan coat.GN 2/1-530x650x115mm

Basket made of rilsan-coated steel wire, grey heat-resistant plastic coating, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter)
- suitable for GN 2/1 platform dispensers.

Weight

kg

2,0

Order no.

[89060206](#)

Basket rilsan coat.GN 2/1 - 530x650x75mm

Basket made of rilsan-coated steel wire, grey heat-resistant plastic coating, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter)
- suitable for GN 2/1 platform dispensers.

Weight

kg

2,0

Order no.

[89060205](#)

Basket rilsan coat.Q 1/1 - 500x500x115mm

Basket made of rilsan-coated steel wire, grey heat-resistant plastic coating, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter)
- suitable for Q 1/1 platform dispenser baskets.

Weight

kg

2,2

Order no.

[89060208](#)

Basket rilsan coat.Q 1/1 - 500x500x75mm

Basket made of rilsan-coated steel wire, grey heat-resistant plastic coating, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter)
- suitable for Q 1/1 platform dispenser baskets.

Weight

kg

1,5

Order no.

[89060207](#)

Basket CNS SV 2/1 - 530x800x120mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for EN and GN 2/1 platform dispensers.

Weight

kg

1,7

Order no.

[89060304](#)

Basket CNS SV 2/1 - 530x800x85mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for EN and GN 2/1 platform dispensers.

Weight	Order no.
kg 1,4	89060303

Basket CNS GN 2/1 - 530x650x115mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for GN 2/1 platform dispensers.

Weight	Order no.
kg 2,3	89060306

Basket CNS GN 2/1 - 530x650x75mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for GN 2/1 platform dispensers.

Weight	Order no.
kg 2,2	89060305

Basket CNS Q 1/1 - 500x500x115mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for Q 1/1 platform dispenser baskets.

Weight	Order no.
kg 2,0	89060308

Basket CNS SV 1/1 - 530x400x120mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for EN and GN 1/1 platform dispensers.

Weight	Order no.
kg 1,5	89060302

Basket CNS Q 1/1 - 500x500x75mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for Q 1/1 platform dispenser baskets.

Weight	Order no.
kg 1,7	89060307

Basket CNS SV 1/1 - 530x400x85mm

Basket made of stainless steel wire, with corner reinforcement (40x25 mm mesh size, 2.5 mm wire mesh diameter, 6 mm stacking frame diameter) - suitable for EN and GN 1/1 platform dispensers.

Weight

kg

1,4

Order no.

[89060301](#)

Cutlery gantry 4x - for platf. dispenser

Cutlery gantry, 4-part, for open platform dispensers.

Weight

kg

7,0

Order no.

[89060903](#)

Sheet, perf. - platf.dispenser SV2/1

Stainless steel metal sheet, perforated, for all SV 2/1 platform dispensers.

Weight

kg

6,5

Order no.

[89071004](#)

Sheet, perf. - platf.dispenser GN2/1

Stainless steel metal sheet, perforated, for all GN 2/1 platform dispensers.

Weight

kg

5,1

Order no.

[89071002](#)

Sheet, perf. - platf.dispenser Q1/1

Stainless steel metal sheet, perforated, for all Q 1/1 platform dispensers.

Weight

kg

2,9

Order no.

[89071001](#)

GN tray - granite decor 530x325mm

GN-Gastronorm tray, granite decor colour, 530x325 mm - for use with all GN tray trolley models.

Weight

kg

0,2

Order no.

[89080281](#)

Ultra dispenser made of stainless steel convection heated - for heat & ultrasonic bowls

2 tubes for 92 ultrasonic bowls (Ø255), stacking height 610mm, shaft dia. 260x260mm per tube. Max. load 75kg, anti-tilt platform, flexible adjustable springs. Double-walled, reinforced heat insulation, reduced surface temperature. 2 stainless steel hinged lids, safety push handle, 4 bumper corners, stainless steel castors (2 swivel & 2 swivel stop castors). Rated voltage 1N AC 230 V 50 Hz.



[More info](#)

Ultra dispenser ERE-260 - 2014

Number of tubes: 2 | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (2 x in stainless steel)

Dimensions mm	Weight kg	Connected load kW	Order no.
1005 x 508 x 1011	75,0	3,200	89040104



Ultra dispenser WEU-Ultra

Number of tubes: 1 für 30 Speiseschalen | Protection class: IPX5 | Castor Ø 125 mm | Incl. cover hood: Included (1 x in stainless steel)

Dimensions mm	Weight kg	Connected load kW	Order no.
1005 x 508 x 1011	70,0	3,200	89040105



Ultra dispenser accessories

Suitable accessories for the Ultra stackers - such as the matching ultrasonic bowls made of stainless steel, also with aluminium core, various safe gloves for handling without risk of burns.



[More info](#)



Ultra bowl CNS - Ø255mm

Ultra bowl made of stainless steel, double-walled, with a wax filling, 255 mm diameter.

Weight	Order no.
kg 0,8	89080141

Heat storage bowl s/s - Ø255mm alu core

Weight	Order no.
kg 0,7	89080130


Gloves - for Ultra bowls

Gloves for use with Ultra bowls (5-fingered).

Weight	Order no.
kg 0,1	89061201


Serving & Rack Trolley

Program Overview

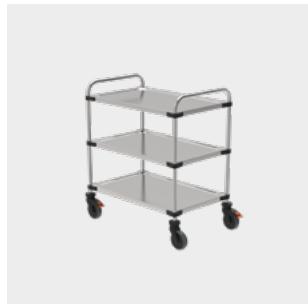


Sервисный тележка из нержавеющей стали в легкой версии

Сделано из круглых труб скользящих брачек, с 2, 3 или 4 глубокими выемками полками с остановкой края, звукоизолированными (размеры 800x500, 1000x500, 1000x600мм) несобранной/собранной. Макс. Макс. нагрузка 80кг на полку. Высота между полками 585 или 275мм. Защищенные от ржавчины колеса, бамперы на каждой полке, отражатели колеса, 2 поворотные колеса и 2 поворотные колеса с остановкой. Плоскость 800x500мм также доступна с гальванизованными колесами.

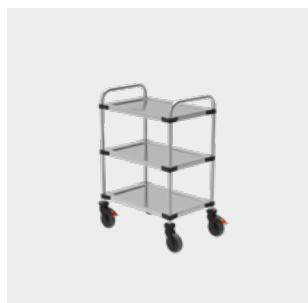


Sервисный тележка из нержавеющей стали в легковесном дизайне - servostar® GN 1/1

Сделано из круглых труб скользящих брачек, с 2 или 3 глубокими выемками (630x400мм) с остановкой края, звукоизолированными, несобранной/собранной. Макс. Макс. нагрузка 80 кг на полку. Защищенные от ржавчины колеса, бамперы на каждой полке, отражатели колеса, 2 поворотные колеса и 2 поворотные колеса с остановкой. Может быть визуально настроена с различными стеклянными полками или функционально расширена с помощью разделительной доски.

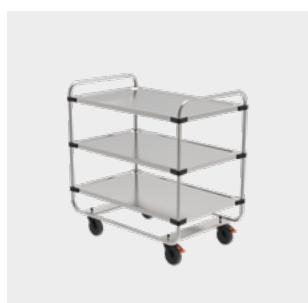

Sервисный тележка из нержавеющей стали в тяжелом исполнении - servo+

Стержневая стальная рама из круглых труб с вваренными крестовыми брусьями для роликового крепления. С 2, 3 или 4 глубокими выемками полками с остановкой края, звукоизолированными (размеры 1000x500, 1000x600мм), установленными. Макс. Макс. нагрузка 80кг на полку. Высота между полками 585 или 275мм. Защищенные от ржавчины колеса, бамперы на каждой полке, отражатели колеса, 2 поворотные колеса и 2 поворотные колеса с остановкой.

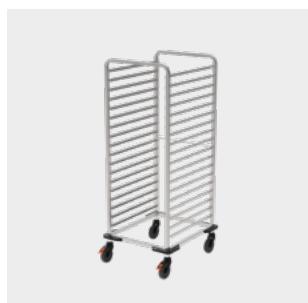


Сервисный тележка из нержавеющей стали для Gastronorm

Различные версии тележек для стеллажей, подходящие для размеров GN. Высокий или низкий тележка, с бамперами или отражателями колеса из квадратной трубы, с U-образными поддерживаемыми направляющими включая защиту от наклона и вваренные в одностороннем или двустороннем анти-пробивании остановки. Общая нагрузка приблизительно 210 кг, приблизительно 15 кг на пару направляющих.

Digital HACCP documentation - safe & time-saving

Digital HACCP documentation with our CHECK HACCP system. Hygiene, cleaning & maintenance checklists via app, can be used anywhere. Paper & complete HACCP, can be viewed centrally in your dashboard in real time from anywhere.

Checklists QR code - can be retrofitted at
any time - Order No. 94 01 01 14



Stainless steel rack trolley for Euronorm



Various versions of shelf trolleys, suitable for EN sizes. With deflector castors made of square tube frame, with U-shaped support rails with anti-tilt device and welded-in push-through stop on both sides. Total load capacity approx. 210 kg, each pair of supports approx. 15 kg.



Stainless steel rack trolley for bakery standard

Various versions of shelf trolleys, suitable for bakery standard. With deflector rollers made of square tube frame, with L-shaped support rails, push-through stops on both sides. Total load capacity approx. 180 kg, each pair of supports approx. 15 kg.



Stainless steel serving trolley in light version

Made of round tube sliding brackets, with 2, 3 or 4 deep-drawn shelves with stop edge, sound-insulated (dimensions 800x500, 1000x500, 1000x600mm) unassembled/assembled. Max. Max. surface load 80kg per shelf. Clearance between shelves 585 or 275mm. Rustproof castors, bumper corners on each shelf, deflector castors, 2 swivel castors & 2 swivel stop castors. Flatpack 800x500mm also available with galvanised castors.



[More info](#)



Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
800 x 500 mm	2	955	mounted	Galvanized	88025004
	2	955	mounted	Rustproof	88025002
	2	955	mounted	Foamed	88025502
	2	955	unmounted	Galvanized	88025003
	2	955	unmounted	Rustproof	88025001
	3	955	mounted	Galvanized	88025008
	3	955	mounted	Rustproof	88025006
	3	955	mounted	Foamed	88025506
	3	955	unmounted	Galvanized	88025007
	3	955	unmounted	Rustproof	88025005
	3	955	unmounted	Foamed	88025505
	4	1265	mounted	Rustproof	88025010
	4	1265	unmounted	Rustproof	88025009



Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
1000 x 500 mm	2	955	mounted	Rustproof	88025012
	2	955	unmounted	Rustproof	88025011
	3	955	mounted	Rustproof	88025014
	3	955	unmounted	Rustproof	88025013
	4	1265	mounted	Rustproof	88025016
	4	1265	unmounted	Rustproof	88025015

Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
1000 x 600 mm	2	955	mounted	Rustproof	88025018
	2	955	mounted	Foamed	88025518
	2	955	unmounted	Rustproof	88025017
	3	955	mounted	Rustproof	88025020
	3	955	mounted	Foamed	88025520
	3	955	unmounted	Rustproof	88025019
	3	955	unmounted	Foamed	88025519
	4	1265	mounted	Rustproof	88025022
	4	1265	unmounted	Rustproof	88025021



Stainless steel serving trolley in lightweight design - servostar® GN 1/1

Made of round tube sliding brackets, with 2 or 3 deep-drawn shelves (630x400mm) with stop edge, sound-insulated, unassembled/assembled. Max. Max. surface load 80 kg per shelf. Rustproof castors, bumper corners on each shelf, deflector castors, 2 swivel castors & 2 swivel stop castors. Can be visually customised with various glass shelves or functionally extended with a cutting board.



More info



Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
630 x 400 mm	2	955	mounted	Rustproof	88025035
	2	955	unmounted	Rustproof	88025036
	3	955	mounted	Rustproof	88025037
	3	955	unmounted	Rustproof	88025038

Stainless steel serving trolley in heavy execution - servo+

Sturdy round tube sliding frame with welded-in crossbars for roller fastening. With 2, 3 or 4 deep-drawn shelves with stop edge, sound-insulated (dimensions 1000x500, 1000x600mm), mounted. Max. Max. surface load 80kg per shelf. Clearance between shelves 585 or 275mm. Rustproof castors, bumper corners on each shelf, deflector castors, 2 swivel castors & 2 swivel stop castors.



More info

Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
1000 x 600 mm	2	1012	mounted	Rustproof	88025030
	3	1012	mounted	Rustproof	88025032
	4	1355	mounted	Rustproof	88025034



Board size	Number of shelves	Height mm	Delivery condition	Castor type	Order no.
1000 x 500 mm	2	1045	mounted	Rustproof	88025024
	3	1045	mounted	Rustproof	88025026
	4	1355	mounted	Rustproof	88025028



Serving trolley accessories

Matching accessories for the serving trolleys - such as various side-integrated clearing containers from 4.9 to 21 litres. Functional plastic worktops, stylish glass inserts in many colour options or inserts made of shatterproof Resopal. Shelves can also be fitted with a corresponding gallery at the top and bottom for additional non-slip storage space.



[More info](#)



Clearing container 21l - serving trolley

Clearing container, 21 litres, made of stainless steel, for hanging on the pushing handle - for the lightweight and heavy-duty servo+ serving trolley.

Weight

kg

2,4

Order no.

[88023001](#)



waste container 4.9l - serving trolley

Clearing container, 4.9 litres, made of stainless steel, for hanging on the pushing handle - for the lightweight and heavy-duty servo+ serving trolley.

Weight

kg

1,2

Order no.

[88023103](#)

Resopal shelf insert „beech“

Weight

kg

750,0

Order no.

[72100589](#)

CHOPPING BOARD servo plastic

Weight

kg

3,5

Order no.

[72100570](#)

Gallery bottom shelf serv. trolley 1060

Weight

kg

-

Order no.

[88023010](#)

Gallery bottom shelf serv. trolley 1050

Weight	Order no.
kg 1,9	88023009

Gallery mid./low.shelf serv.trolley 640

Weight	Order no.
kg 2,0	88023011

Gallery bottom shelf serv. trolley 850

Weight	Order no.
kg 1,0	88023008

Gallery top shelf serv. trolley 1050/-60

Weight	Order no.
kg 0,9	88023003

Gallery top shelf serving trolley 850

Weight	Order no.
kg 1,0	88023002

Gallery top shelf serving trolley 640

Circumferential gallery made of stainless steel round material, suitable for upper shelf of serving trolley.

Weight	Order no.
kg 2,0	88023012

Stainless steel rack trolley for Gastronorm

Various versions of rack trolleys, suitable for GN sizes. High or low trolley, with bumpers or deflector rollers made of square tube frame, with U-shaped support rails including tilt protection and welded-in single-sided or double-sided anti-push-through stops. Total load capacity approx. 210 kg, approx. 15 kg per pair of support rails.



[More info](#)



GN rack trolley 2/1 low - defl. castors

8 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions	Weight	Pairs of support rails	Order no.
mm 648 x 739 x 845	kg 19,0	8	8804010501

GN rack trolley 2/1 low - corner bumpers

8 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions	Weight	Pairs of support rails	Order no.
mm 656 x 747 x 845	kg 18,0	8	8804010601

GN rack trolley 2/1 low, 900-round bump.

8 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions	Weight	Pairs of support rails	Order no.
mm 748 x 639 x 900	kg 15,0	8	8804160301

GN rack trolley 2/1 - defl. castors

18 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions	Weight	Pairs of support rails	Order no.
mm 648 x 738 x 1641	kg 19,0	18	8804050101

GN rack trolley 2/1 - corner bumpers

18 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
656 x 747 x 1641	19,0	18	8804050201

Tray trolley 2/1 - corner bumpers

12 Pairs of support rails | Suitable for for trays (GN 2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535,5 mm | vertical: 110 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
656 x 746 x 1641	19,0	12	8804160201

Tray trolley 2x1/1 - corner bumpers

2 x 12 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 332,5 mm | vertical: 110 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
813 x 627 x 1641	29,0	2 x 12	8804160101

Tray troll. 2/1 wide rails, defl. castor

12 Pairs of support rails | Suitable for for trays (GN 2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 110 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions mm	Weight kg	Pairs of support rails	Order no.
648 x 739 x 1641	25,0	12	8804120201

Tray troll. 2/1 wide rails, corner bump.

12 Pairs of support rails | Suitable for for trays (GN 2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 110 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
648 x 739 x 1641	25,5	12	8804120401



Space-saving rack troll. 1/1-defl.castor

18 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 2/8) | Clear width between the rails horizontal: 330 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
382 x 559 x 1647	25,9	18	8804190501



Space-saving rack troll. 2/1-defl.castor

18 Pairs of support rails | Suitable for for trays (GN 2/1, 1/1, 2/4) | Clear width between the rails horizontal: 533 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
646 x 739 x 1641	22,0	18	8804190101



GN rack troll. 2/1 flat pack,defl.castor

18 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 fixed-; 1 siwvel-; 1 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
648 x 739 x 1641	22,5	18	88040801



GN rack trolley 2/1 - for insertion

18 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 fixed-; 1 siwvel-; 1 swivel castors with brakes | Rustproof | Castor Ø 125 mm |

Dimensions mm	Weight kg	Pairs of support rails	Order no.
588 x 679 x 1641	20,0	18	88040601



GN rack trolley 1/1 - deflector castors

18 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
445 x 619 x 1641	16,0	18	8804090101

GN rack trolley 1/1 - corner bumpers

18 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
453 x 627 x 1641	19,0	18	8804090201

GN rack trolley 2x1/1 -deflector castors

2 x 18 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions mm	Weight kg	Pairs of support rails	Order no.
805 x 619 x 1641	27,0	2 x 18	8804070101

GN rack trolley 2x1/1 - corner bumpers

2 x 18 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers



Dimensions mm	Weight kg	Pairs of support rails	Order no.
813 x 627 x 1641	28,5	2 x 18	8804070201

GN rack trolley 1/1 low - round bump.

8 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 335 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions mm	Weight kg	Pairs of support rails	Order no.
410 x 584 x 845	12,0	8	8804230101

GN rack troll. 2x1/1 low, round bump.

2 x 8 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors



Dimensions mm	Weight kg	Pairs of support rails	Order no.
805 x 619 x 845	23,0	2 x 8	8804030501



GN rack trolley 2x1/1 low - cor. bumpers

2 x 8 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers

Dimensions	Weight	Pairs of support rails	Order no.
mm 805 x 619 x 845	kg 23,0	2 x 8	8804030601



Rack trolley for navioven

8 Pairs of support rails | Suitable for for GN (2/1, 1/1, 2/4) | Clear width between the rails horizontal: 535 mm | vertical: 73 mm | Anti-push-through device both sides | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers

Dimensions	Weight	Pairs of support rails	Order no.
mm 656 x 747 x 857	kg 20,0	8	88040113



Storage trolley 23 cool. pellets 180-1/1

23 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 58 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions	Weight	Pairs of support rails	Order no.
mm 445 x 619 x 1641	kg 22,0	23	88040910



Storage trolley 46 cool. pellets 180-2/1

46 Pairs of support rails | Suitable for for GN (1/1, 2/3, 1/3, 1/2, 2/8) | Clear width between the rails horizontal: 332 mm | vertical: 58 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions	Weight	Pairs of support rails	Order no.
mm 805 x 619 x 1641	kg 29,0	46	88040709



Rack trolley for K|POT® 1/1 - corner bum

9 Pairs of support rails | Suitable for for GN 1/1 | Clear width between the rails horizontal: 550 mm | vertical: 150 mm | Anti-push-through device front | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 corner bumpers

Dimensions	Weight	Pairs of support rails	Order no.
mm 668 x 508 x 1641	kg 24,0	9	88042601



Rack trolley f. prison food tray set

2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 160 mm | circumferential impact protection

Dimensions	Weight	Pairs of support rails	Order no.
mm 806 x 868 x 1639	kg 45,0	-	88043105

Stainless steel rack trolley for Euronorm

Various versions of shelf trolleys, suitable for EN sizes. With deflector castors made of square tube frame, with U-shaped support rails with anti-tilt device and welded-in push-through stop on both sides. Total load capacity approx. 210 kg, each pair of supports approx. 15 kg.



[More info](#)



Tray trolley EN stand.,corner bump.

12 Pairs of support rails | Suitable for for Euronorm-Trays | Clear width between the rails horizontal: 378 mm | vertical: 110 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | | Castor Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Pairs of support rails	Order no.
499 x 627 x 1641	21,0	12	88041401



Tray troll. 2xEN stand.,corner bump.

2 x 12 Pairs of support rails | Suitable for for Euronorm-Trays | Clear width between the rails horizontal: 378 mm | vertical: 110 mm | Anti-push-through device | 2 swivel-; 2 swivel castors with brakes | | Castor Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Pairs of support rails	Order no.
905 x 627 x 1641	36,0	2 x 12	88041402



Stainless steel rack trolley for bakery standard

Various versions of shelf trolleys, suitable for bakery standard. With deflector rollers made of square tube frame, with L-shaped support rails, push-through stops on both sides. Total load capacity approx. 180 kg, each pair of supports approx. 15 kg.



[More info](#)



Rack trolley - 400 x 600 - defl. castors

20 Pairs of support rails | Clear width between the rails horizontal: 405 mm | vertical: 73 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Rustproof | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
517 x 691 x 1784	18,0	20	88042501



Rack trolley - 800 x 600 - defl. castors

20 Pairs of support rails | Clear width between the rails horizontal: 605 mm | vertical: 73 mm | Anti-push-through device one side | 2 swivel-; 2 swivel castors with brakes | Castor Ø 125 mm | 4 deflector castors

Dimensions mm	Weight kg	Pairs of support rails	Order no.
718 x 891 x 1687	23,7	20	88042502

Rack trolley accessories

Matching accessories for the rack trolleys - such as matching EN or GN trays for insertion, up to GN refrigerated or GN deep-freeze plates, for additional passive cold holding. Optimal protection & insulation with 3-sided stainless steel cladding or insulating / dust cover. Slip resistance via extendable push-through barrier.



[More info](#)

Vertic. hinged bar 1 side f.2 parts RW

Weight	Order no.
kg	88041561

Vertic. hinged bar 1 side f.rack trolley

Weight	Order no.
kg	88041560

EN tray - granite decor 530x370mm

EN-Euro standard tray, granite decor colour, 530x370 mm - for use with all EN tray trolley models.

Weight	Order no.
kg	89080272

GN tray - granite decor 530x325mm

GN-Gastronorm tray, granite decor colour, 530x325 mm - for use with all GN tray trolley models.

Weight	Order no.
kg	89080281

GN cooling pellet CNS 1/1 - 30mm

Stainless steel GN 1/1 cooling plate for pre-heating and passive cooling during the transportation of food in Rieber thermoport® models, can be inserted horizontally on the support rails.



Weight	Order no.
kg	85012002



GN cooling plate 1/1 plastic

Plastic cooling plate in a GN size - to insert for passively keeping food cold in GN containers.

Weight

kg

3,1

Order no.

[85022095](#)



GN cooling pellet 1/1 plastic - black

Plastic GN 1/1 cooling plate for pre-heating and passive cooling during the transportation of food in Rieber thermoport® models, can be inserted horizontally on the support rails.

Weight

kg

2,7

Order no.

[85022067](#)



GN cooling pellet plastic 1/1 - orange

Plastic GN 1/1 cooling plate for pre-heating and passive cooling during the transportation of food in Rieber thermoport® models, can be inserted horizontally on the support rails.

Weight

kg

2,6

Order no.

[85022038](#)

Insulation hood - rack trolley

Insulation hood for rack trolleys for GN size 2/1, 1/1 and 2/4 - with fleece insulation for hygienic and temperature-safe cold/hot food distribution.

Weight

kg

7,1

Order no.

[88041502](#)

Protective hood - rack trolley

Dust cover for rack trolleys for GN size 2/1, 1/1 and 2/4 - without insulation for hygienic transport.

Weight

kg

1,0

Order no.

[88041503](#)

Panel.s/s 3-side - tray trolley 2xEN

3-sided stainless steel panelling for EN standard double tray trolleys - for hygienic and temperature-safe cold/hot food distribution.

Weight

kg

-

Order no.

[88041517](#)

Panel.s/s 3-side rack troll. 2/1

3-sided stainless steel panelling for rack trolleys for GN size 2/1, 1/1 and 2/4 - for hygienic and temperature-safe cold/hot food distribution.

Weight

kg

-

Order no.[88041504](#)**Panel.s/s 3-side rack troll. 2x2/1**

3-sided stainless steel panelling for double rack trolleys for GN size 2/1, 1/1 and 2/4 - for hygienic and temperature-safe cold/hot food distribution.

Weight

kg

-

Order no.[88041505](#)**Closed base in stainless steel 180-1E****Weight**

kg

-

Order no.[58041203](#)

Mobile helpers

Program Overview




Special trolleys Variants - made of stainless steel/ Plastic

Stainless steel potato & vegetable wash trolley with deep-drawn 90L basin and beaded rim, lever drain valve with strainer 2". Stainless steel material trolley, deep-drawn for 90L with removable hinged lid and galvanised castors. Material trolley made of plastic, seamless for 90L with ball drainage tap 1/2", moulded push handle, removable hinged lid and galvanised castors.



Universal trolley Variants - stainless steel

Platform trolley Universal, for baskets, for heavy transport. Platform with stop rim, drain hole, push handle, stainless steel castors. Multi-purpose trolleys, deep-drawn for collecting/transporting/storing, 2 carrying handles & lid. Each model with mobile base, 4 swivel castors Ø75mm. With 4 fixed swivel castors Ø50mm. Suspended chassis with pedal opening & 2 Ø80mm plastic/stainless steel castors.

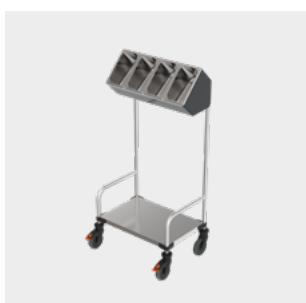

Cutlery & Tray Trolley

The cutlery tray, available as a counter top or as a wall-mounted version with two hanging brackets. The anthracite-coloured plastic container with 4 or 8 GN 1/4 cutlery inserts, covered with a transparent, hinged, half-sided plastic lid. Capacity per cutlery insert approx. 100 cutlery pieces.



Cutlery boxes



The anthracite-coloured plastic container, with 4 or 8 GN 1/4 cutlery inserts and/or with napkin dispenser. The cutlery inserts covered with a transparent, hinged, half-sided plastic lid. Capacity per cutlery insert approx. 100 cutlery items, napkin dispenser approx. 300 napkins. Mobile, stainless steel castors, 2 swivel castors & 2 swivel stop castors.

Digital HACCP documentation - safe & time-saving

Digital HACCP documentation with our CHECK HACCP system. Hygiene, cleaning & maintenance checklists via app, can be used anywhere. Paper & complete HACCP, can be viewed centrally in your dashboard in real time from anywhere.



Checklists QR code - can be retrofitted at any time - Order No. 94 01 01 14

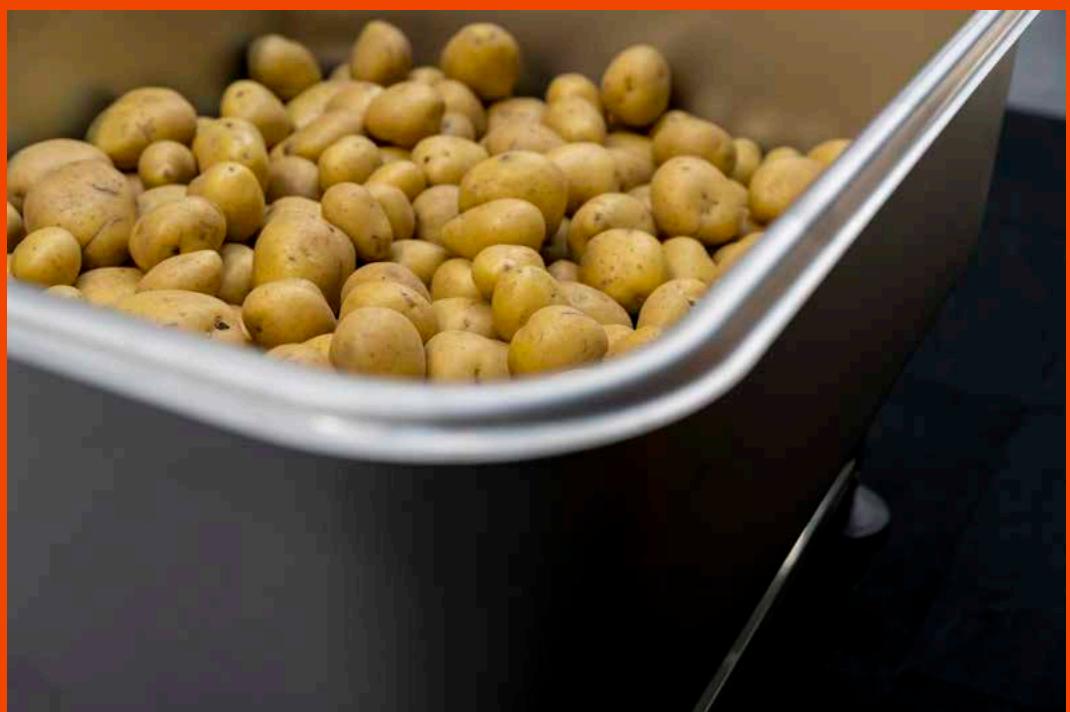

Special trolleys

Variants - made of stainless steel/ Plastic

Stainless steel potato & vegetable wash trolley with deep-drawn 90L basin and beaded rim, lever drain valve with strainer 2". Stainless steel material trolley, deep-drawn for 90L with removable hinged lid and galvanised castors. Material trolley made of plastic, seamless for 90L with ball drainage tap 1/2", moulded push handle, removable hinged lid and galvanised castors.



[More info](#)



Potato-vegetable trolley s/s - 90l

2 swivel-; 2 swivel castors with brakes | Castor Ø 125 mm |

Dimensions	Weight	Order no.
mm 807 x 615 x 605	kg 15,0	88050103



Potato-vegetable trolley s/s - 160l

2 swivel-; 2 swivel castors with brakes | Castor Ø 125 mm |

Dimensions	Weight	Order no.
mm 807 x 615 x 577	kg 15,0	88050203



Material trolley s/s - 90l

2 swivel-; 2 swivel castors with brakes | Castor Ø 75 mm |

Dimensions	Weight	Order no.
mm 614 x 414 x 595	kg 9,5	88060103

Universal trolley

Variants - stainless steel

Platform trolley Universal, for baskets, for heavy transport. Platform with stop rim, drain hole, push handle, stainless steel castors. Multi-purpose trolleys, deep-drawn for collecting/transporting/storing, 2 carrying handles & lid. Each model with mobile base, 4 swivel castors Ø75mm. With 4 fixed swivel castors Ø50mm. Suspended chassis with pedal opening & 2 Ø80mm plastic/stainless steel castors.



[More info](#)



Platform trolley - baskets - 532x532mm

2 swivel-; 2 swivel castors with brakes | 4 corner bumpers | Castor Ø 125 mm

Dimensions	Weight	Order no.
mm	kg	
657 x 657 x 880	10,0	88070402



Platform Trolley

2 swivel-; 2 swivel castors with brakes | 4 corner bumpers | Castor Ø 125 mm

Dimensions	Weight	Order no.
mm	kg	
792 x 657 x 880	10,0	88070403



Platform trolley - heavy-duty - 1060

2 fixed-; 1 swivel-; 1 swivel castors with brakes | 4 corner bumpers | Castor Ø 160 mm

Dimensions	Weight	Order no.
mm	kg	
1070 x 670 x 952	22,0	88070301



Platform trolley - heavy-duty - 1260

2 fixed-; 1 swivel-; 1 swivel castors with brakes | 4 corner bumpers | Castor Ø 160 mm

Dimensions	Weight	Order no.
mm	kg	
1265 x 665 x 952	24,0	88070302



Multi-purpose bucket s/s

| | Castor Ø

Dimensions	Weight	Order no.
mm	kg	
492	6,0	88090202





Sub-frame with 4 swivel castors Ø 75 mm

4 swivel castors | | Castor Ø 75 mm

Dimensions	Weight	Order no.
mm	kg	
313 x 313 x 134	2,0	88090304



Multi-purpose bucket s/s - s/s castors

3 swivel-; 1 swivel castor with brakes | | Castor Ø 75 mm

Dimensions	Weight	Order no.
mm	kg	
590	8,0	88090204



Multi-pur. trolley s/s,with s/s castors

3 swivel-; 1 swivel castor with brakes | | Castor Ø 75 mm

Dimensions	Weight	Order no.
mm	kg	
592	7,0	88090102



Multi-purpose trolley s/s

3 swivel-; 1 swivel castor with brakes | | Castor Ø 75 mm

Dimensions	Weight	Order no.
mm	kg	
592	7,9	88090201



Multi-purpose trolley s/s with sub-frame

3 swivel-; 1 swivel castor with brakes | | Castor Ø 75 mm

Dimensions	Weight	Order no.
mm	kg	
592	7,9	88090101



Waste trolley CNS

4 swivel castors with brakes | | Castor Ø 50 mm

Dimensions	Weight	Order no.
mm	kg	
556	7,3	88090502



Waste buggy CNS - with sub-frame

2 fixed castors | | Castor Ø 80 mm

Dimensions	Weight	Order no.
mm	kg	
490 x 393 x 800	8,4	88090501

Cutlery wash trolley 2/1 GN well 90l

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
850 x 670 x 576	28,0	88260102



Universal stacking trolley 1-sided

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
1200 x 500 x 970	30,0	88025077



Universal stacking trolley 2-sided

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
1200 x 800 x 970	60,0	88025099



Spice trolley 2 wells

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
765 x 635 x 900	27,0	88210101



Spoon trolley 3 shelves

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
975 x 575 x 1100	16,0	88200101



Flat platform trolley CNS

2 swivel-; 2 swivel castors with brakes | 4 deflector castors | Castor Ø 125 mm

Dimensions mm	Weight kg	Order no.
450 x 450 x 500	7,0	88090601



Cutlery & Tray Trolley

The cutlery tray, available as a counter top or as a wall-mounted version with two hanging brackets. The anthracite-coloured plastic container with 4 or 8 GN 1/4 cutlery inserts, covered with a transparent, hinged, half-sided plastic lid. Capacity per cutlery insert approx. 100 cutlery pieces.



[More info](#)



Tray & cutlery trolley 1-comp.

2 swivel-; 2 swivel castors with brakes | Castor-Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Version	Order no.
648 x 428 x 1350	15,2	4 cutlery insert & 100 trays	79010202



Tray & cutlery trolley 2-comp.

2 swivel-; 2 swivel castors with brakes | Castor-Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Version	Order no.
648 x 787 x 1350	22,0	8 cutlery insert & 200 trays	79010204



Tray & cutlery trolley 1-comp., napkin

2 swivel-; 2 swivel castors with brakes | Castor-Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Version	Order no.
648 x 428 x 1350	17,8	4 cutlery insert & 100 trays	79010201



Tray & cutlery trolley 2-comp., napkin

2 swivel-; 2 swivel castors with brakes | Castor-Ø 125 mm | 4 corner bumpers

Dimensions mm	Weight kg	Version	Order no.
648 x 787 x 1350	25,0	8 cutlery insert & 200 trays	79010203

Cutlery boxes

The anthracite-coloured plastic container, with 4 or 8 GN 1/4 cutlery inserts and/or with napkin dispenser. The cutlery inserts covered with a transparent, hinged, half-sided plastic lid. Capacity per cutlery insert approx. 100 cutlery items, napkin dispenser approx. 300 napkins. Mobile, stainless steel castors, 2 swivel castors & 2 swivel stop castors.



[More info](#)

Cutlery frame 1-comp. plastic

Dimensions mm	Weight kg	cutlery inserts	Order no.
648 x 288 x 291	6,0	4	79010101



Cutlery frame 2-comp. plastic

Dimensions mm	Weight kg	cutlery inserts	Order no.
648 x 476 x 476	13,7	8	79010102



Cutlery frame wall version 1-pc.

Dimensions mm	Weight kg	cutlery inserts	Order no.
648 x 288 x 288	6,1	4	79010301



Cutlery frame wall version 2-pc.

Dimensions mm	Weight kg	cutlery inserts	Order no.
648 x 476 x 476	12,0	8	79010302



