

Cooling Bath 126 kg

Model – Cooling bath 126 kg with pull-out baskets



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 126 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

14 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
1 pcs cage for 14 baskets
1 pcs basket trolley

Bath

Kg per batch	126 kg
Water capacity	450 L
Dimensions L x W x H	1544 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	3 kWh
Input current, amp	10 A
Drain diameter	100 mm
Cold water	3/4" 3 bar
Pumps	1 pcs
Weight with baskets without water	350 kg
Weight with water, baskets, product	926 kg

Crane

Dimensions, rail length x height	3094 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit ANL-Q 070 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the ANL Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.




The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit ANL-Q 070

Cooling capacity	16,7 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	2834 l/h by 159 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power	5 kWh
Input current, amp	11 A
Dimensions L x W x H	1165 x 550 x 1281 mm
Weight including glycol	226 kg

Cooling Bath 126 kg

metos

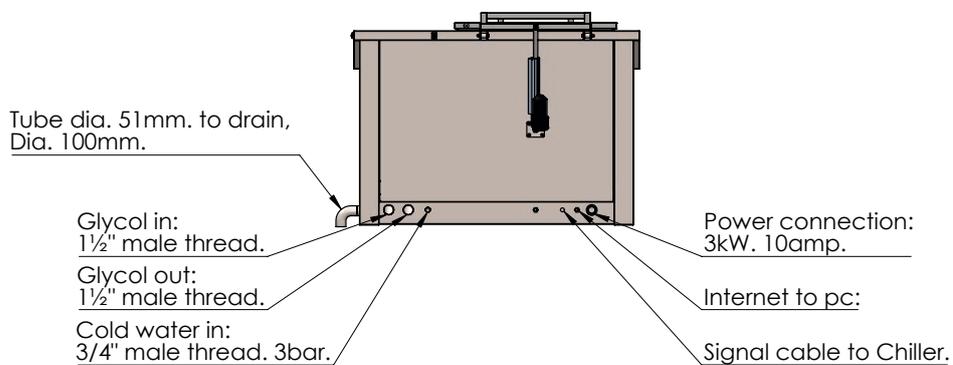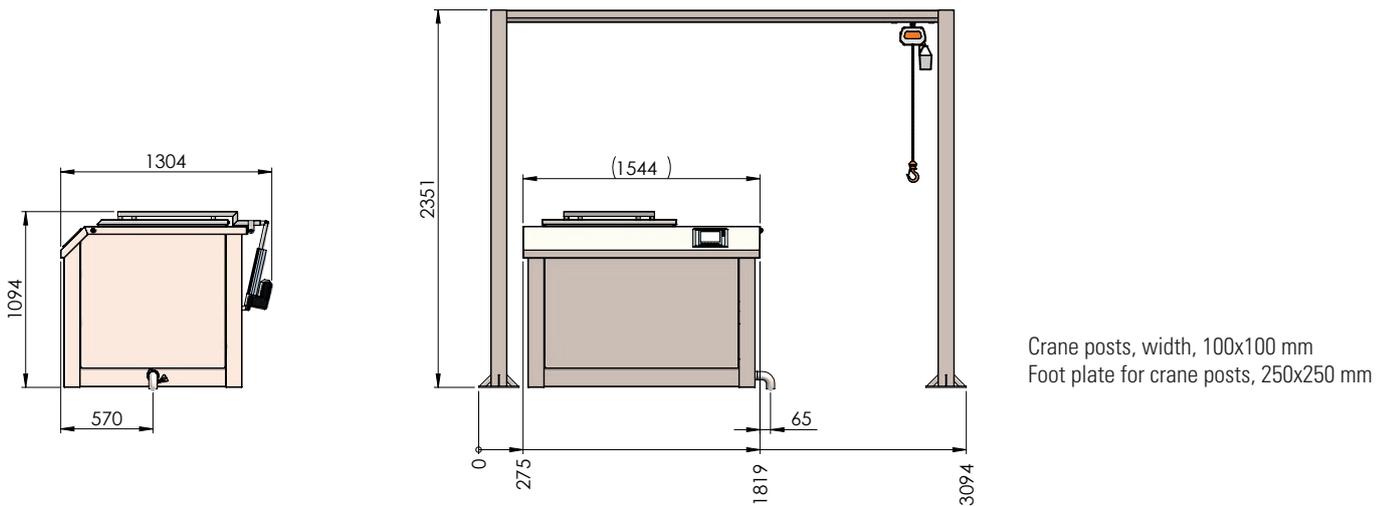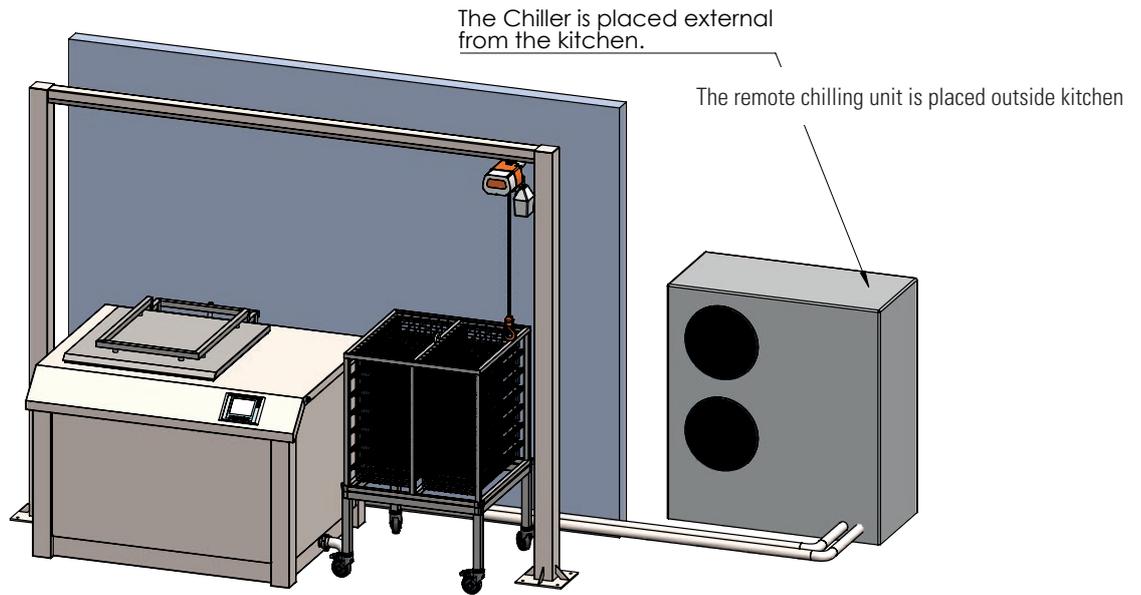

Glycol / cooling water connection between bath and chiller must be 38 mm stainless steel pipe 1,5" male thread, length max 20 metres.

Cooling Bath 190 kg

Model – Cooling bath 190 kg with pull-out baskets



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 190 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

21 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
1 pcs cage for 7 baskets + 1 pcs cage for 14 baskets
2 pcs basket trolley

Bath

Kg per batch	190 kg
Water capacity	660 L
Dimensions L x W x H	1944 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	3 kWh
Input current, amp	10 A
Drain diameter	100 mm
Cold water	1" 3 bar
Pumps	1 pcs
Weight with baskets without water	400 kg
Weight with water, baskets, product	1250 kg

Crane

Dimensions, rail length x height	3494 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit ANL-Q 090 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the ANL Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.



The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit ANL-Q 090


Cooling capacity	22,5 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	3831 l/h by 140 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power	6,8 kWh
Input current, amp	14 A
Dimensions L x W x H	1165 x 550 x 1281 mm
Weight including glycol	262 kg

Cooling Bath 190 kg

metos

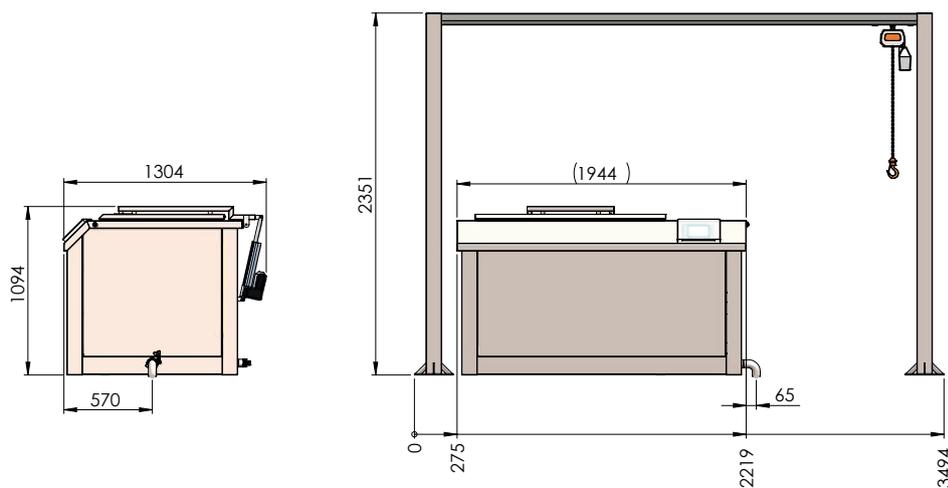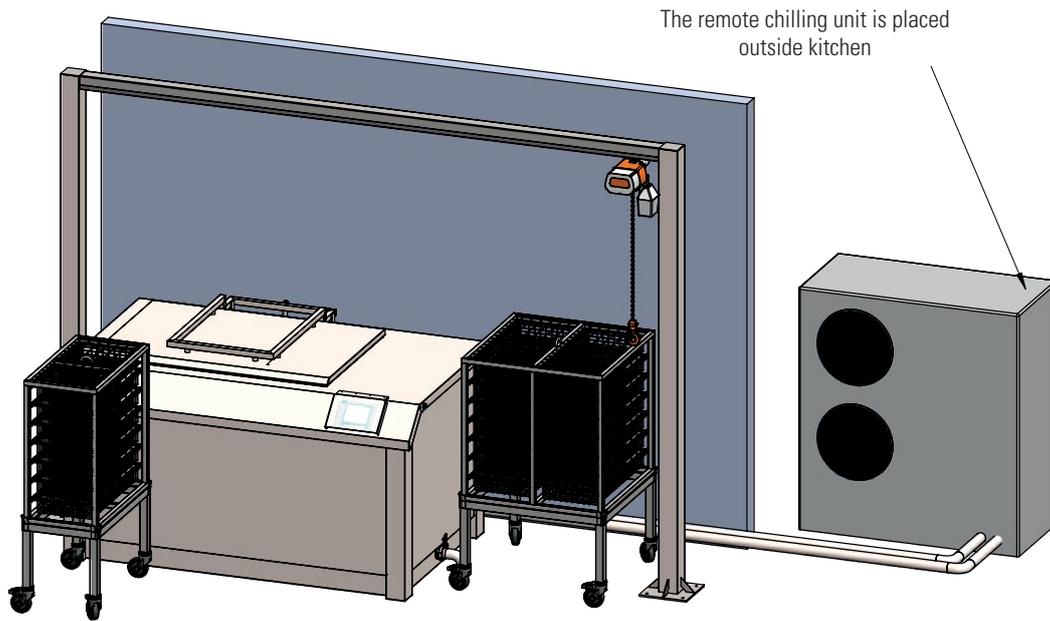

Crane posts, width, 100x100 mm
Foot plate for crane posts, 250x250 mm

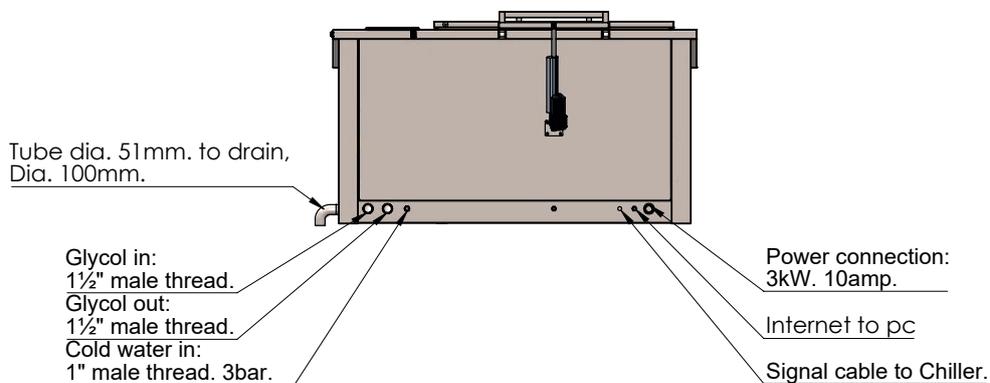

Glycol / cooling water connection between bath and chiller must be 38 mm stainless steel pipe 1,5" male thread, length max 20 metres.

Cooling Bath 250 kg

Model – Cooling bath 250 kg with pull-out baskets



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 250 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

28 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
2 pcs cage for 14 baskets
2 pcs basket trolley

Bath

Kg per batch	250 kg
Water capacity	900 L
Dimensions L x W x H	2344 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	3 kWh
Input current, amp	10 A
Drain diameter	100 mm
Cold water	1" 3 bar
Pumps	1 pcs
Weight with baskets without water	550 kg
Weight with water, baskets, product	1700 kg

Crane

Dimensions, rail length x height	3894 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit ANL-Q 152 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the ANL Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.




The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit ANL-Q 152

Cooling capacity	33,3 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	5669 l/h. by 185 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power	10,6 kWh
Input current, amp	21 A
Dimensions L x W x H	1750 x 750 x 1450 mm
Weight including glycol	464 kg

Cooling Bath 250 kg

metos

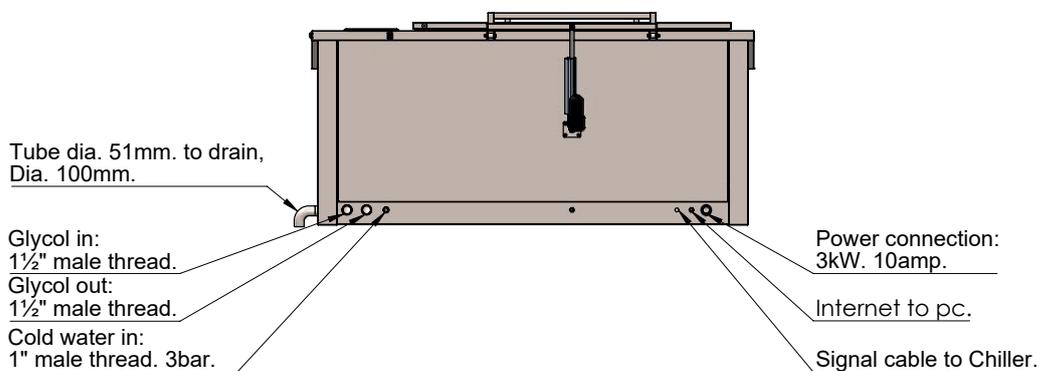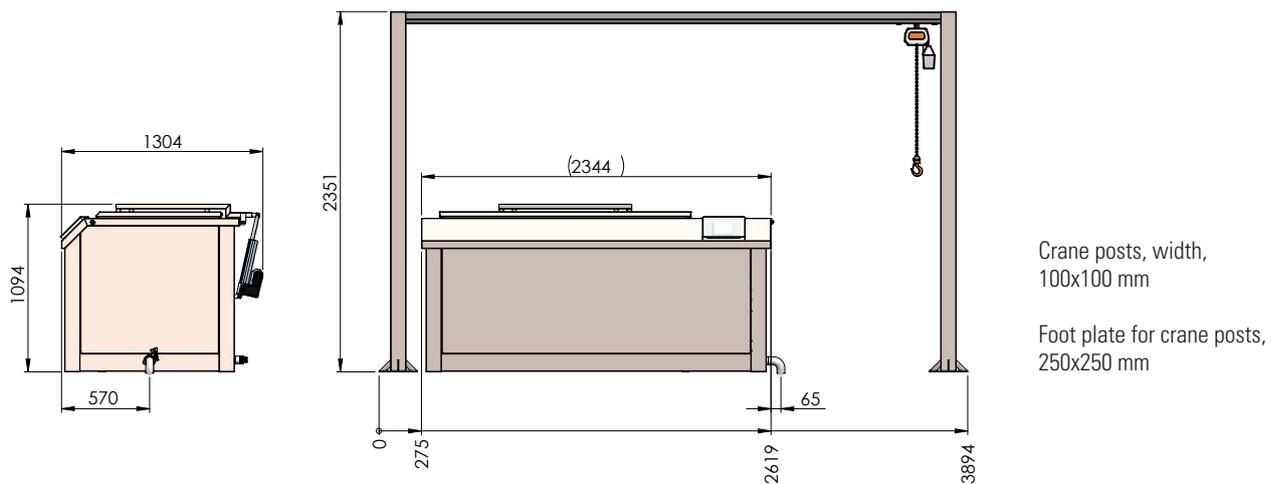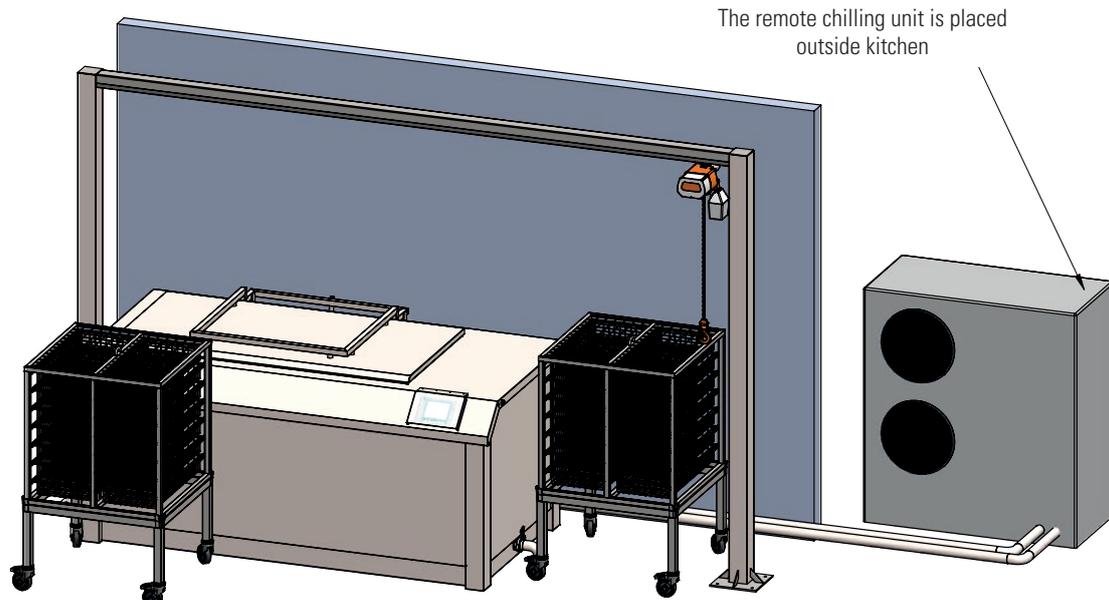

Glycol / cooling water connection between bath and chiller must be 38 mm stainless steel pipe 1,5" male thread, length max 20 metres.

Cooling Bath 300 kg

Model – Cooling bath 300 kg with pull-out baskets



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 300 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

35 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
1 pcs cage for 7 baskets +2 pcs cage for 14 baskets
3 pcs basket trolley

Bath

Kg per batch	300 kg
Water capacity	1140 L
Dimensions L x W x H	2744 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	3 kWh
Input current, amp	10 A
Drain diameter	100 mm
Cold water	5/4" 3 bar
Pumps	1 pcs
Weight with baskets without water	700 kg
Weight with water, baskets, product	2140 kg

Crane

Dimensions, rail length x height	4294 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit ANL-Q 152 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the ANL Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.




The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit ANL-Q 152

Cooling capacity	33,3 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	5669 l/h. by 185 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power	10,6 kWh
Input current, amp	21 A
Dimensions L x W x H	1750 x 750 x 1450 mm
Weight including glycol	464 kg

Cooling Bath 300 kg

metos

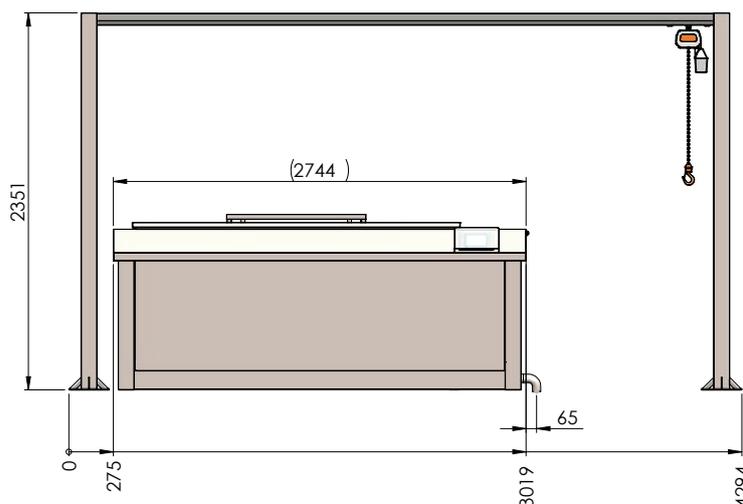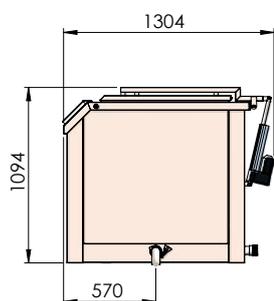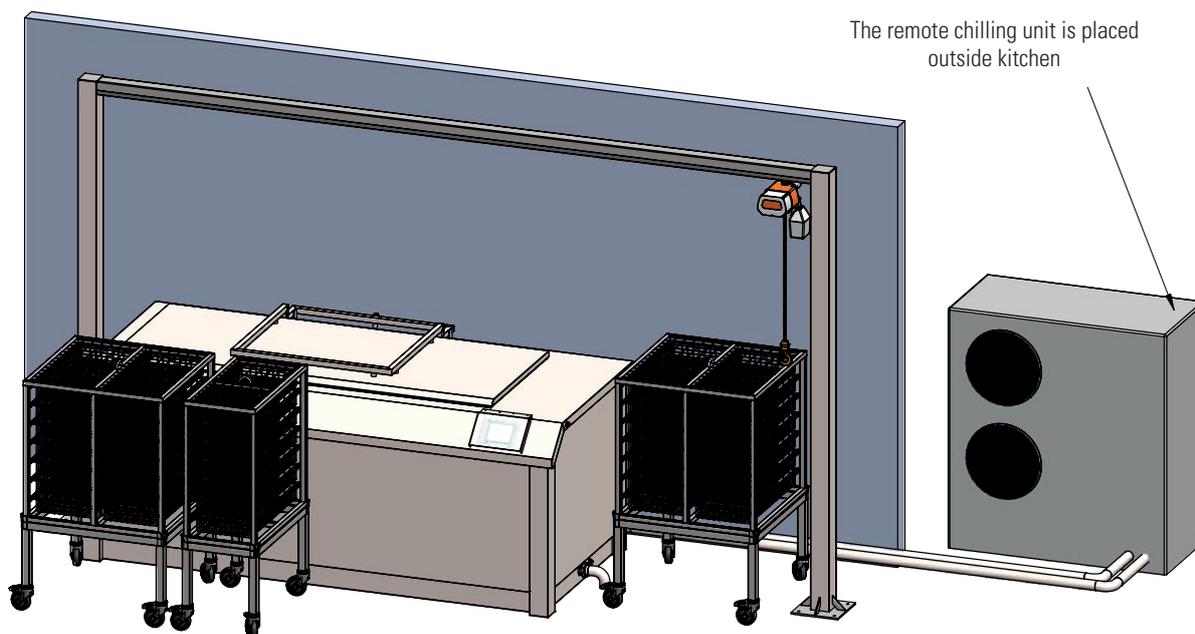

Crane posts, width, 100x100 mm

Foot plate for crane posts, 250x250 mm

Tube dia. 51mm. to drain, Dia. 100mm.

Glycol in: 2" male thread.
Glycol out: 2" male thread.
Cold water in: 5/4" male thread. 3bar.

Power connection: 3kW. 10amp.

Internet to pc.

Signal cable to Chiller.

Glycol / cooling water connection between cooling bath and chiller must be 54 mm stainless steel pipe 2" male thread, maximum 20 m

Cooling Bath 378 kg

Model – Cooling bath 378 kg with pull-out baskets



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 378 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

42 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
3 pcs cage for 14 baskets
3 pcs basket trolley

Bath

Kg per batch	378 kg
Water capacity	1350 L
Dimensions L x W x H	3144 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	6 kWh
Input current, amp	13 A
Drain diameter	100 mm
Cold water	5/4" 3 bar
Pumps	2 pcs
Weight with baskets without water	850 kg
Weight with water, baskets, product	2578 kg

Crane

Dimensions, rail length x height	4694 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit ANL-Q 202 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the ANL Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.


The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit ANL-Q 202


Cooling capacity	43,3 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	7387 l/h by 159 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power	13,8 kWh
Input current, amp	27 A
Dimensions L x W x H	1750 x 750 x 1450 mm
Weight including glycol	500 kg

Cooling Bath 378 kg

metos

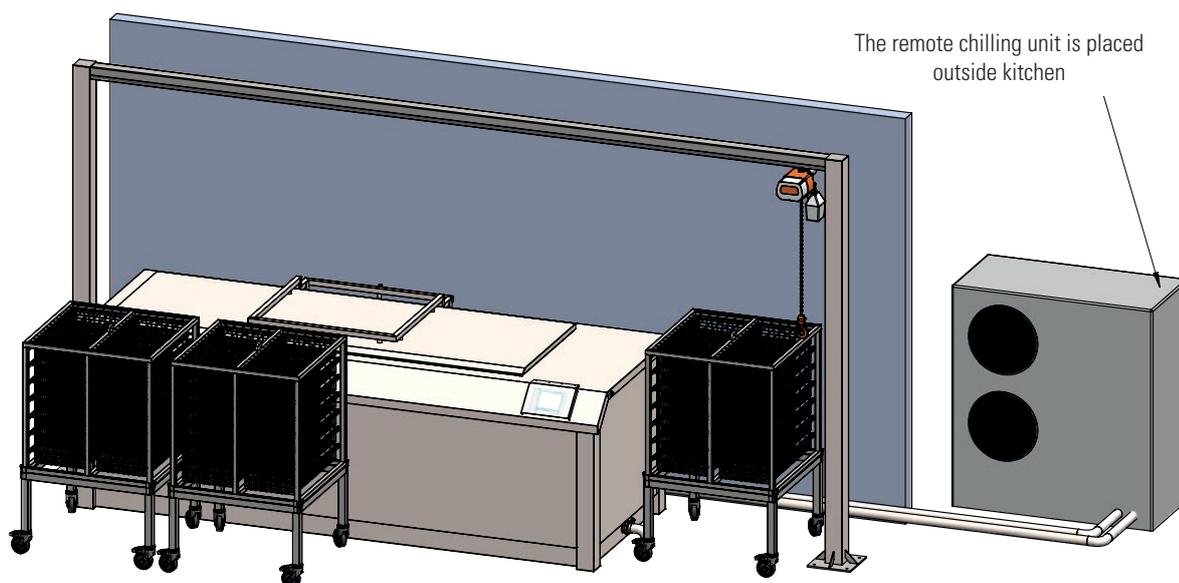

The remote chilling unit is placed outside kitchen

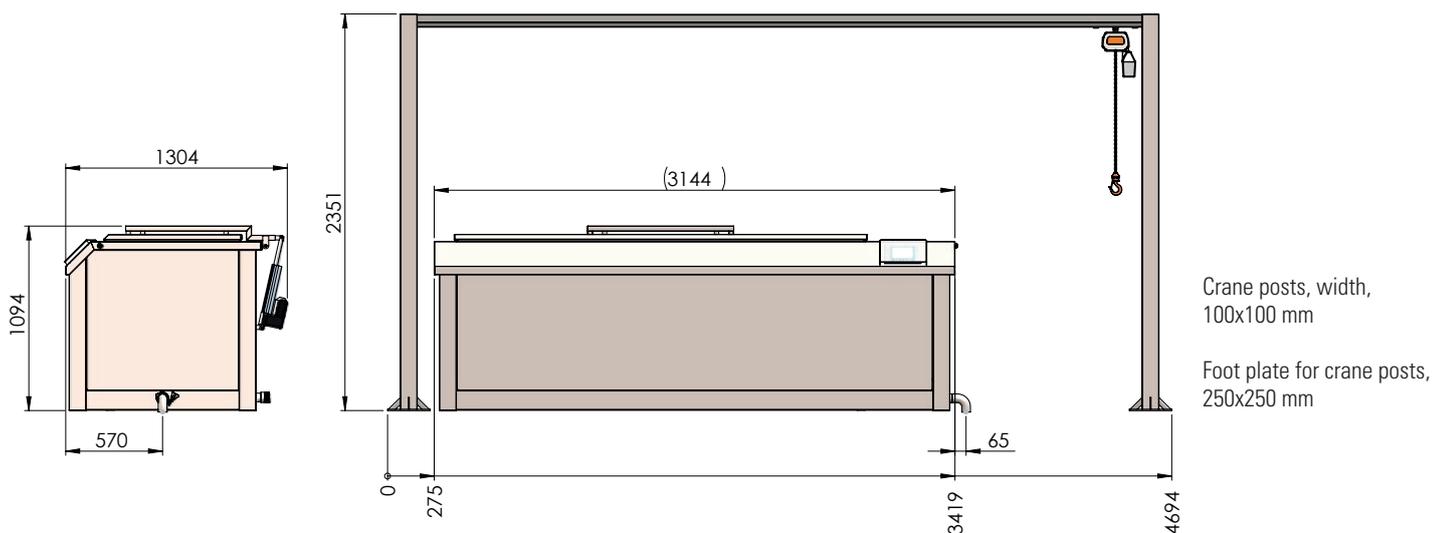

Crane posts, width, 100x100 mm

Foot plate for crane posts, 250x250 mm

Tube dia. 51mm. to drain,
Dia. 100mm.

Glycol in:
2" male thread.
Glycol out:
2" male thread.
Cold water in:
5/4" male thread. 3bar.

Power connection:
6kW. 13amp.

Internet to pc.

Signal cable to Chiller.

Glycol / cooling water connection between cooling bath and chiller must be 54 mm stainless steel pipe 2" male thread, maximum 20 m

Cooling Bath 450 kg

Model – Cooling bath 450 kg with pull-out baskets



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 450 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

49 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
1 pcs cage for 7 baskets +3 pcs cage for 14 baskets
4 pcs basket trolley

Bath

Kg per batch	450 kg
Water capacity	1550 L
Dimensions L x W x H	3544 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	9 kWh
Input current, amp	16 A
Drain diameter	100 mm
Cold water	5/4" 3 bar
Pumps	3 pcs
Weight with baskets without water	1000 kg
Weight with water, baskets, product	3000 kg

Crane

Dimensions, rail length x height	5094 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit NRB-L282 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- 2 pcs separate cooling circuits (regarding the freon quantity)
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the NRB Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.

The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).



Chilling Unit NRB-L282

Cooling capacity	56,5 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	9734 l/h by 37 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power,	19,8 kWh
Input current, amp	35 A
Dimensions L x W x H	2450 x 1100 x 1680 mm
Weight including glycol	1110 kg

Cooling Bath 450 kg


metos

The remote chilling unit is placed outside kitchen

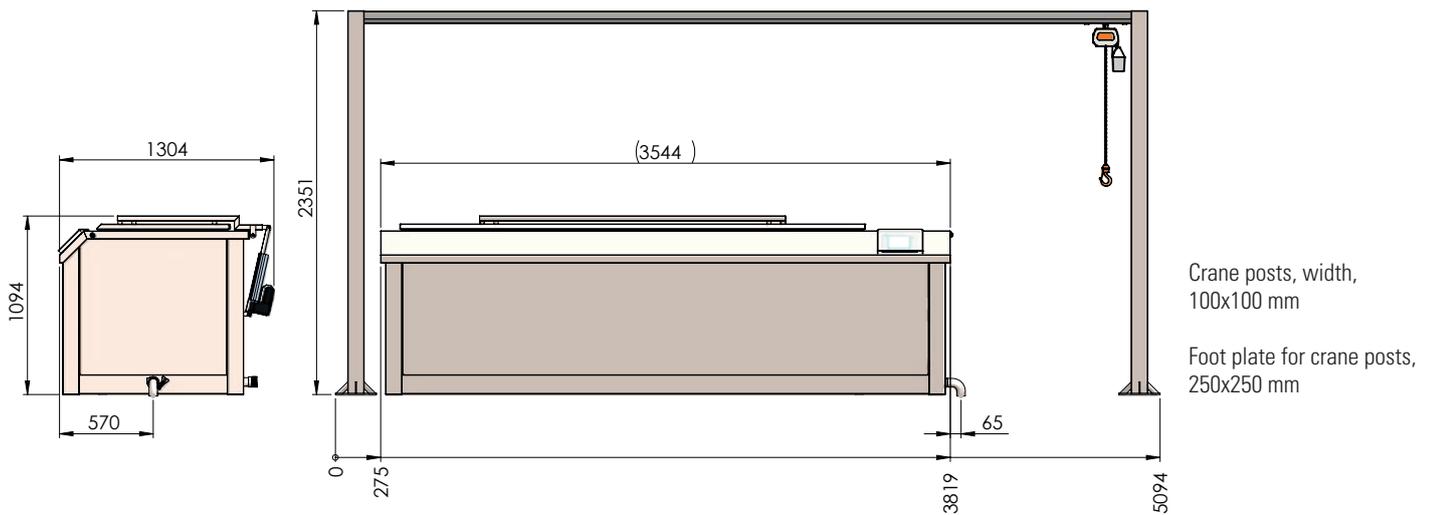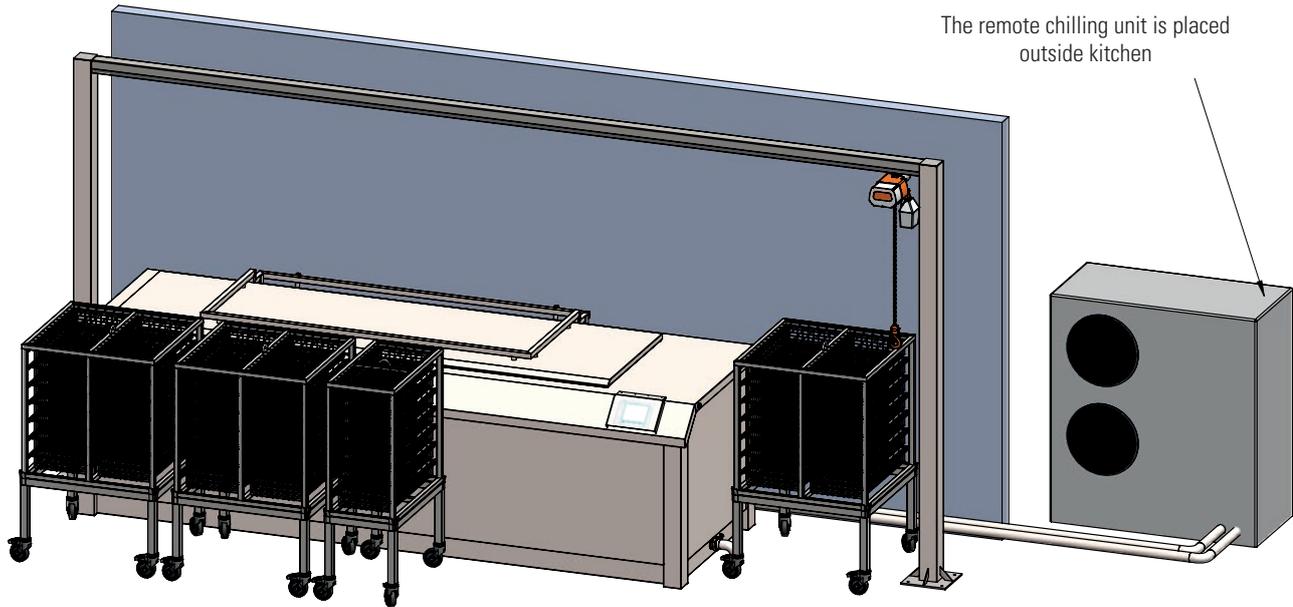

Tube dia. 51mm. to drain,
Dia. 100mm.

Glycol in:
2" male thread.
Glycol out:
2" male thread.
Cold water in:
5/4" male thread. 3bar.

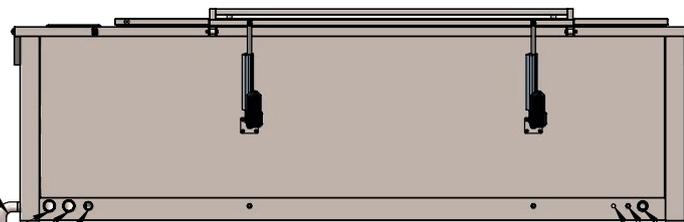

Power connection:
9kW. 16amp.

Internet to pc.

Signal cable to Chiller.

Glycol / cooling water connection between cooling bath and chiller must be 54 mm stainless steel pipe 2" male thread, maximum 20 m

Cooling Bath 500 kg

Model – Cooling bath 500 kg with pull-out baskets



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 500 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

56 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
4 pcs cage for 14 baskets
4 pcs basket trolley

Bath

Kg per batch	500 kg
Water capacity	1800 L
Dimensions L x W x H	3944 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	9 kWh
Input current, amp	16 A
Drain diameter	100 mm
Cold water	5/4" 3 bar
Pumps	3 pcs
Weight with baskets without water	1150 kg
Weight with water, baskets, product	3450 kg

Crane

Dimensions, rail length x height	5494 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit NRB-L 302 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- 2 pcs separate cooling circuits (regarding the freon quantity)
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the NRB Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.




The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit NRB-L 302

Cooling capacity	64,3 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	11090 l/h by 48 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power,	22,2 kWh
Input current, amp	41 A
Dimensions L x W x H	2450 x 1100 x 1680 mm
Weight including glycol	1128 kg

Cooling Bath 500 kg

metos

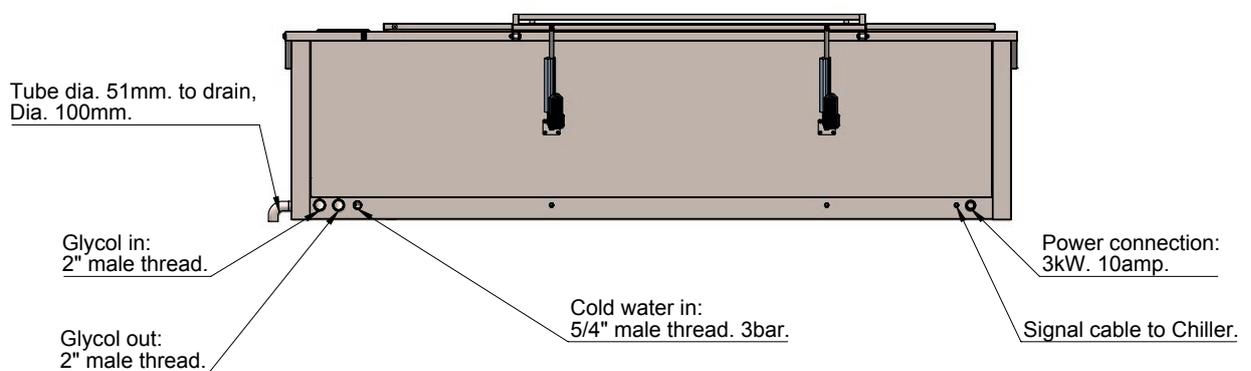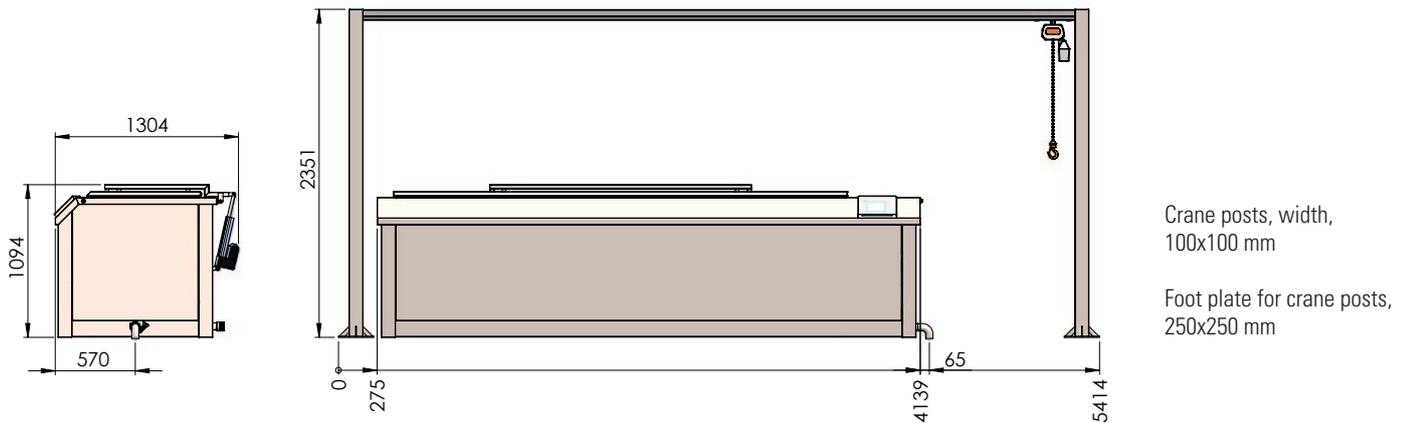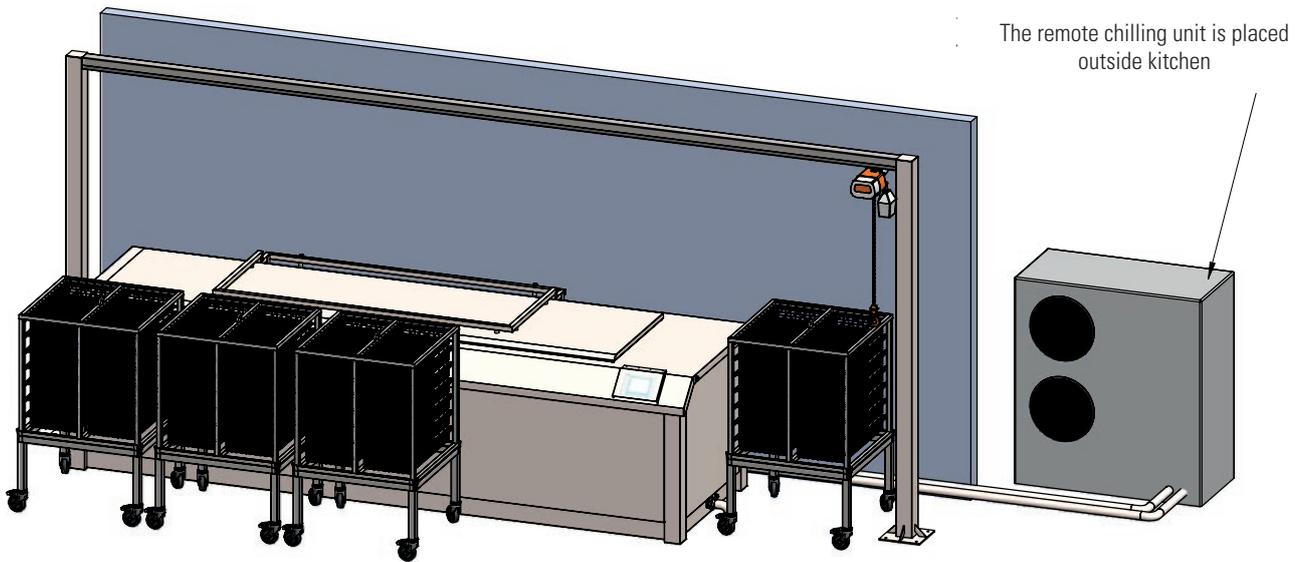

Glycol / cooling water connection between cooling bath and chiller must be 54 mm stainless steel pipe 2" male thread, maximum 20 m

Cooling Bath 1000 kg

Model – Cooling bath 1000 kg with pull-out baskets



Pull-out baskets as standard, stackable baskets on special order.

Standard features

- Designed in polished, stainless steel, material AISI 304
- The baskets are lifted by crane, mounted above the Cooling bath
- Features a built-in CIP system for automatic cleaning of concealed pipes and exchangers
- Colour touch-screen
- All recipes are made on the touch-screen
- Temperature / data log with USB storage device for self-monitoring
- Programs can be stored
- Remembers and restarts automatically on power failure
- Capacity to cool down 1000 kg product from +95°C to +3°C
- Nozzles to achieve the best possible circulation
- Mounted outflow strainer at the bottom of the bath
- Exchanger to prevent the cooling water/ product water to mix with ice water/process water
- The cool down period depends on product type and the layer thickness
- The cold water temperature must be no more than 15°C. If the temperature of the supplied water is higher, it should be mentioned when ordering due to the capacity of the cooler.
- The cold water must be changed as needed.

112 pcs pull-out baskets - size L730 mm x W330 mm x H80 mm
8 pcs cage for 14 baskets
8 pcs basket trolley

Bath

Kg per batch	1000 kg
Water capacity	3600 L
Dimensions L x W x H	7144 x 1304 x 1094 mm
Power supply	3x400V + Earth, 50 Hz
Input power	9 kWh
Input current, amp	16 A
Drain diameter	100 mm
Cold water	5/4" 3 bar
Pumps	3 pcs
Weight with baskets without water	1900 kg
Weight with water, baskets, product	6500 kg

Crane

Dimensions, rail length x height	8694 x 2351 mm
CEE plug, supply	230V, 50 Hz
Motor effect	300 W

Remote Chilling Unit NRB-L 604 Air cooled

- 1 pcs compact chiller with build-in water tank, flow pump and electric control
- 2 pcs separate cooling circuits (regarding the freon quantity)
- Electronic fan control (winter management)
- Freon and environmental control charge is included

Placing of the NRB Chiller air-cooled unit:

The chiller must be placed outside or at a ventilated location due to high heat emission.



The surface under the unit must be flat, smooth and sufficiently strong to withstand the weight of the unit with a full refrigerant load, as well as the normal maintenance equipment. Place the cooler outside in a place that is not exposed to excessive wind (install windbreaks if the wind speed exceeds 2.2 m/s).

Chilling Unit NRB-L 604

Cooling capacity	121,5 kWh at -1°C in flow / + 4°C at return (water-glycol mixture 70/30)
Freon type	R-410 A
Flow pump	1 pcs
Flow rate	20937 l/h by 46 kPa
Power supply	3 x 400 Volt + Neutral + Earth, 50 Hz
Input power,	47,6 kWh
Input current, amp	82 A
Dimensions L x W x H	3200 x 1100 x 1900 mm
Weight including glycol	1560 kg

Cooling Bath 1000 kg

metos

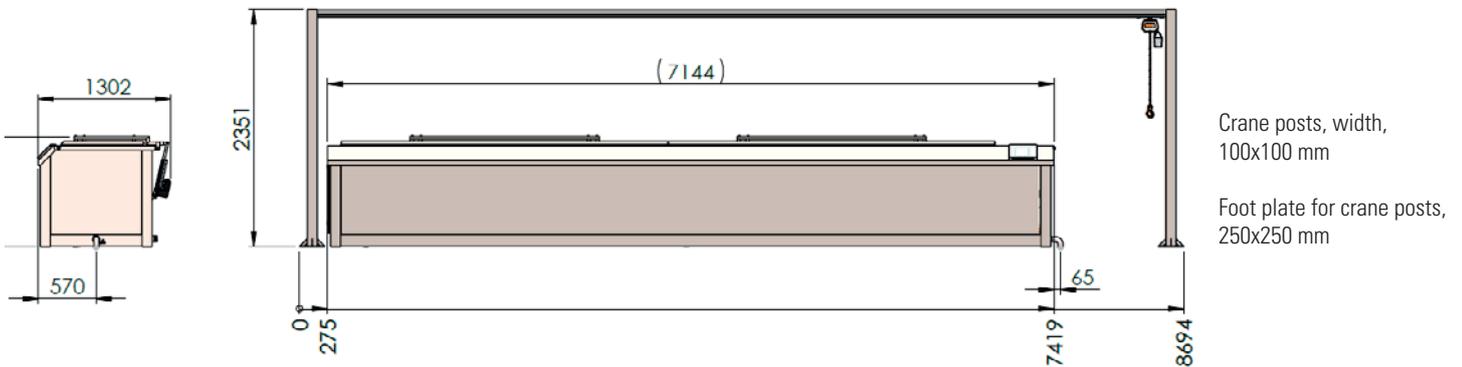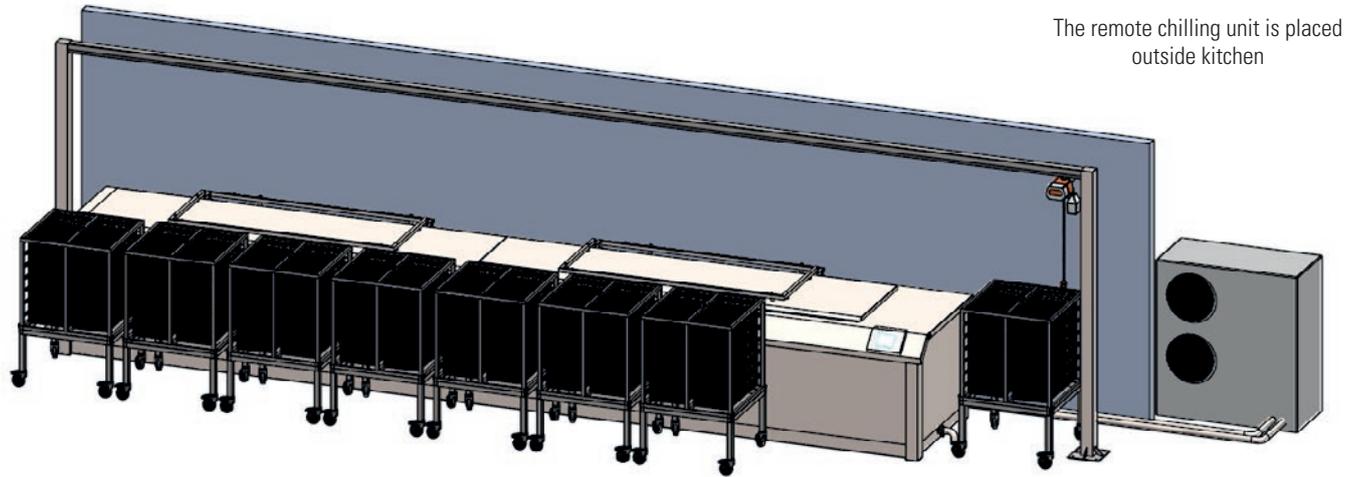

Tube dia. 51mm.
to drain,
Dia. 100mm.

Glycol in:
2" male thread.

Glycol out:
2" male thread.

Cold water in:
5/4" male thread. 3bar.

Power connection:
9kW. 16amp.

Internet to pc.
Signal cable
to chiller.

Glycol / cooling water connection between cooling bath and chiller must be 54 mm stainless steel pipe 2" male thread, maximum 20 m